

FEATURES

- ▶ **Smallest Encapsulated 40W Converter!**
- ▶ **Package Size 2.0" x 1.0" x 0.4"**
- ▶ **Ultra-wide 4:1 Input Range**
- ▶ **Excellent Efficiency up to 90%**
- ▶ **Operating Temp. Range -40°C to +80°C**
- ▶ **Over-temperature Protection**
- ▶ **I/O-isolation Voltage 1500VDC**
- ▶ **Remote On/Off Control**
- ▶ **Shielded Metal Case with Isolated Baseplate**
- ▶ **3 Years Product Warranty**

NEW



PRODUCT OVERVIEW

The MKWI40 series is the latest generation of high performance DC-DC converter modules setting a new standard concerning power density. The product offers fully 40W in an encapsulated, shielded metal package with dimensions of just 2.0"x1.0"x0.4". All models provide ultra-wide 4:1 input voltage range and precisely regulated output voltages.

Advanced circuit topology provides a very high efficiency up to 90% which allows an operating temperature range of -40°C to +80°C. Further features include remote On/Off, trimmable output voltage, under-voltage lockout as well as overload and over-temperature protection.

Typical applications for these converters are battery operated equipment, instrumentation, distributed power architectures in communication and industrial electronics and many other space critical applications.

Model Selection Guide

| Model Number | Input Voltage (Range) VDC | Output Voltage VDC | Output Current | | Input Current | | Reflected Ripple Current mA (typ.) | Over Voltage Protection VDC | Max. capacitive Load μ F | Efficiency (typ.) @Max. Load % |
|---------------|---------------------------|--------------------|----------------|-----------|---------------------|-------------------|------------------------------------|-----------------------------|------------------------------|--------------------------------|
| | | | Max. mA | Min. mA | @Max. Load mA(typ.) | @No Load mA(typ.) | | | | |
| | | | | | | | | | | |
| MKWI40-24S033 | 24 (9 ~ 36) | 3.3 | 8000 | 0 | 1240 | 90 | 30 | 3.9 | 21000 | 89 |
| MKWI40-24S05 | | 5 | 8000 | 0 | 1850 | 90 | | 6.2 | 13600 | 90 |
| MKWI40-24S12 | | 12 | 3330 | 0 | 1870 | 95 | | 15 | 2400 | 89 |
| MKWI40-24S15 | | 15 | 2670 | 0 | 1870 | 105 | | 18 | 1500 | 89 |
| MKWI40-24S24 | | 24 | 1670 | 0 | 1870 | 115 | | 30 | 600 | 89 |
| MKWI40-24D12 | | \pm 12 | \pm 1670 | \pm 145 | 1890 | 65 | | \pm 15 | 1200# | 88 |
| MKWI40-24D15 | | \pm 15 | \pm 1330 | \pm 110 | 1890 | 65 | | \pm 18 | 750# | 88 |
| MKWI40-48S033 | 48 (18 ~ 75) | 3.3 | 8000 | 0 | 620 | 55 | 20 | 3.9 | 21000 | 89 |
| MKWI40-48S05 | | 5 | 8000 | 0 | 930 | 55 | | 6.2 | 13600 | 90 |
| MKWI40-48S12 | | 12 | 3330 | 0 | 930 | 60 | | 15 | 2400 | 90 |
| MKWI40-48S15 | | 15 | 2670 | 0 | 930 | 65 | | 18 | 1500 | 90 |
| MKWI40-48S24 | | 24 | 1670 | 0 | 940 | 75 | | 30 | 600 | 89 |
| MKWI40-48D12 | | \pm 12 | \pm 1670 | \pm 145 | 950 | 45 | | \pm 15 | 1200# | 88 |
| MKWI40-48D15 | | \pm 15 | \pm 1330 | \pm 110 | 950 | 45 | | \pm 18 | 750# | 88 |

For each output

Input Specifications

| Parameter | Model | Min. | Typ. | Max. | Unit |
|-----------------------------------|-------------------------------|--|------|------|------|
| Input Surge Voltage (100ms. max.) | 24V Input Models | -0.7 | --- | 50 | VDC |
| | 48V Input Models | -0.7 | --- | 100 | |
| Start-Up Threshold Voltage | 24V Input Models | --- | --- | 9 | |
| | 48V Input Models | --- | --- | 18 | |
| Under Voltage Lockout | 24V Input Models | --- | 8.3 | --- | |
| | 48V Input Models | --- | 16.5 | --- | |
| Input Polarity Protection | None | | | | |
| Start Up Time | Power Up | --- | --- | 30 | ms |
| | Remote On/Off | Nominal Vin and Constant Resistive Load | | 30 | ms |
| Internal Filter Type | All Models | LC Filter (for EN55022, Class A compliance see page 7) | | | |
| Short Circuit Current | --- (Hiccup Mode 1.5 Hz typ.) | | | | |



| Output Specifications | | | | | | |
|-------------------------------------|--|---------------|------|-------|-------------------|---|
| Parameter | Conditions | Min. | Typ. | Max. | Unit | |
| Output Voltage Setting Accuracy | At 50% Load and Nominal Vin | --- | --- | ±1.0 | %Vnom. | |
| Output Voltage Balance | Dual Output, Balanced Loads | --- | --- | ±2.0 | % | |
| Line Regulation | Vin=Min. to Max. | --- | --- | ±0.5 | % | |
| Load Regulation | Min. Load to Full Load | Single Output | --- | --- | ±0.5 | % |
| | | Dual Output | --- | --- | ±1.0 | % |
| Load Cross Regulation (Dual Output) | Asymmetrical Load 25%/100% Full Load | --- | --- | ±5.0 | % | |
| Minimum Load | No Minimum Load Requirement for Single Output Models, for dual Output Models see Table | | | | | |
| Ripple & Noise (20MHz) | 3.3V & 5V Output Models | --- | 100 | --- | mV _{P-P} | |
| Ripple & Noise (20MHz) | 12V, 15V & 24V Models | --- | 150 | --- | mV _{P-P} | |
| Ripple & Noise (20MHz) | Dual Output Models | --- | 150 | --- | mV _{P-P} | |
| Transient Recovery Time | 25% Load Step Change | --- | 250 | --- | µsec | |
| Temperature Coefficient | | --- | --- | ±0.02 | %/°C | |
| Over Load Protection | Current Limitation at 150% typ. of Iout max., Hiccup | | | | | |
| Short Circuit Protection | Hiccup Automatic Recovery | | | | | |
| Over Voltage Protection | For Shutdown Voltage see Model Selection Guide | | | | | |

| General Specifications | | | | | | |
|-------------------------------|--|---------|------|------|-------|--|
| Parameter | Conditions | Min. | Typ. | Max. | Unit | |
| I/O Isolation Voltage (rated) | 60 Seconds | 1500 | --- | --- | VDC | |
| I/O Isolation Resistance | 500 VDC | 1000 | --- | --- | MΩ | |
| I/O Isolation Capacitance | 100KHz, 1V | --- | --- | 1500 | pF | |
| Switching Frequency | | --- | 320 | --- | KHz | |
| MTBF(calculated) | MIL-HDBK-217F@25°C, Ground Benign | 328,000 | --- | --- | Hours | |
| Safety Approvals(pending) | UL/cUL 60950-1 recognition(CSA certificate), IEC/EN 60950-1(CB-scheme) | | | | | |

| Input Fuse | |
|-----------------------|-----------------------|
| 24V Input Models | 48V Input Models |
| 8000mA Slow-Blow Type | 4000mA Slow-Blow Type |


| Remote On/Off Control | | | | | | | |
|-----------------------------|--------------|------------------------------|------|------|------|--|--|
| Parameter | Conditions | Min. | Typ. | Max. | Unit | | |
| Converter On | | 4.7V ~ 12V or Open Circuit | | | | | |
| Converter Off | | 0V ~ 1.2V or Short Circuit | | | | | |
| Control Input Current (on) | Vctrl = 5.0V | --- | 0.5 | --- | mA | | |
| Control Input Current (off) | Vctrl = 0V | --- | -0.5 | --- | mA | | |
| Control Common | | Referenced to Negative Input | | | | | |
| Standby Input Current | Nominal Vin | --- | 2.5 | --- | mA | | |

| Output Voltage Trim | | | | | | |
|----------------------|-----------------------------|------|------|------|------|--|
| Parameter | Conditions | Min. | Typ. | Max. | Unit | |
| Trim Up / Down Range | % of nominal output voltage | ±10 | --- | --- | % | |


| Environmental Specifications | | | | | | |
|---|-------------------------------------|------------|------------------|---------------|----------|--|
| Parameter | Model | Min. | Max. | | Unit | |
| | | | without Heatsink | with Heatsink | | |
| Operating Ambient Temperature Range (Natural Convection, see Derating) | MKWI40-XXS033 | -40 | 66 | 73 | °C | |
| | MKWI40-24S05, MKWI40-48S05 | | 51 | 61 | | |
| | MKWI40-48S12, MKWI40-48S15 | | | | | |
| | MKWI40-24S12, MKWI40-24S15 | | 45 | 57 | | |
| | MKWI40-24D12, MKWI40-24D15 | | | | | |
| | MKWI40-48D12, MKWI40-48D15 | | 40 | 52 | | |
| Thermal Impedance | Natural Convection without Heatsink | 12.0 | --- | --- | °C/W | |
| | Natural Convection with Heatsink | 10.0 | --- | --- | °C/W | |
| | 100LFM Convection without Heatsink | 9.0 | --- | --- | °C/W | |
| | 100LFM Convection with Heatsink | 5.4 | --- | --- | °C/W | |
| | 200LFM Convection without Heatsink | 8.0 | --- | --- | °C/W | |
| | 200LFM Convection with Heatsink | 4.5 | --- | --- | °C/W | |
| | 400LFM Convection without Heatsink | 6.0 | --- | --- | °C/W | |
| | 400LFM Convection with Heatsink | 3.0 | --- | --- | °C/W | |
| Case Temperature | | --- | +105 | | °C | |
| Thermal Protection | Shutdown Temperature | 110°C typ. | | | | |
| Storage Temperature Range | | -50 | +125 | | °C | |
| Humidity (non condensing) | | --- | 95 | | % rel. H | |
| RFI | Six-Sided Shielded, Metal Case | | | | | |
| Lead Temperature (1.5mm from case for 10Sec.) | | --- | 260 | | °C | |




Power Derating Curve

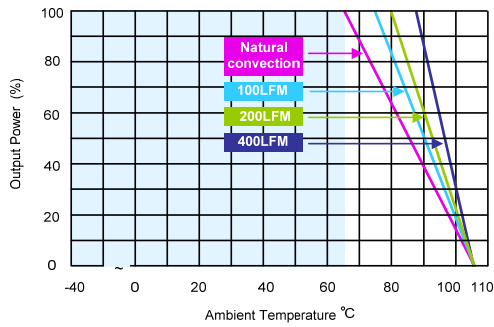


MKWI40-24S033, MKWI40-48S033 Derating Curve without Heatsink

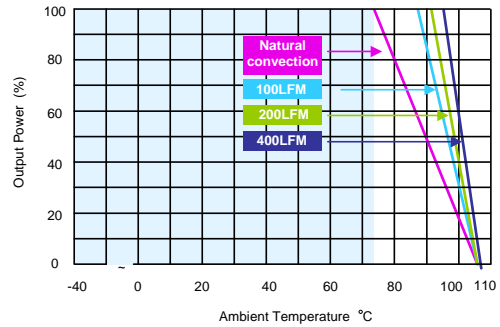


MKWI40-24S033, MKWI40-48S033 Derating Curve with Heatsink

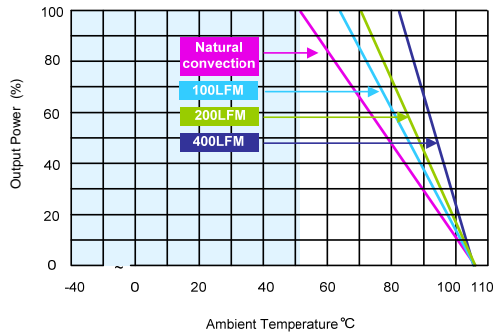


MKWI40-24S05, MKWI40-48S05, MKWI40-48S12, MKWI40-48S15 Derating Curve without Heatsink

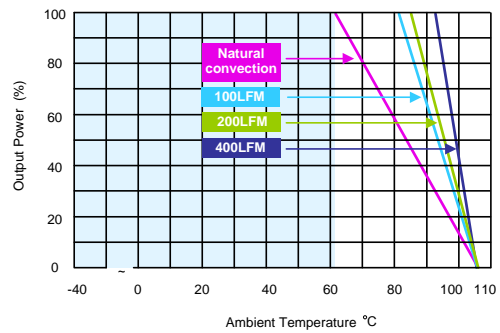


MKWI40-24S05, MKWI40-48S05, MKWI40-48S12, MKWI40-48S15 Derating Curve with Heatsink

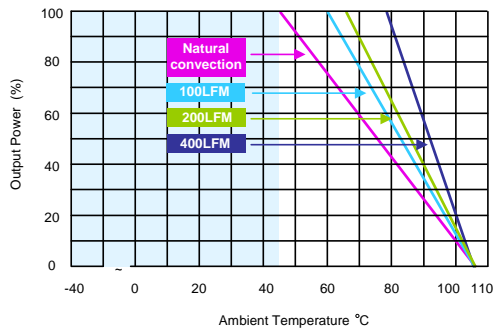


MKWI40-24S12, MKWI40-24S15 Derating Curve without Heatsink

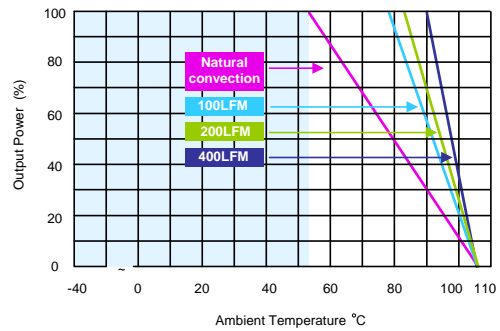

MKWI40-24S12, MKWI40-24S15 Derating Curve with Heatsink

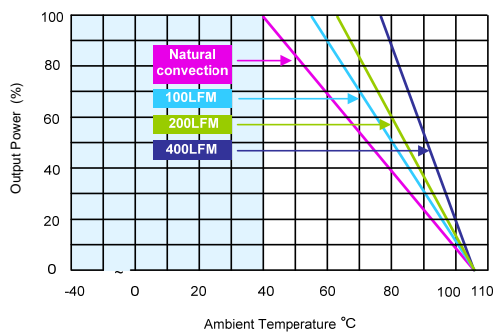


MKWI40-24D12, MKWI40-24D15, MKWI40-48D12, MKWI40-48D15 Derating Curve without Heatsink

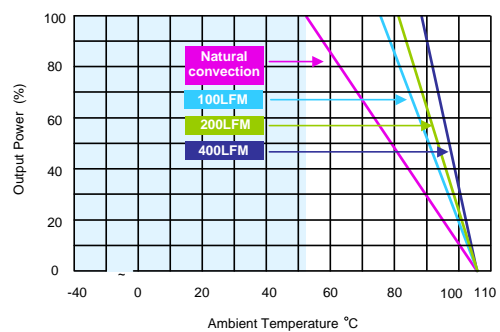


MKWI40-24D12, MKWI40-24D15, MKWI40-48D12, MKWI40-48D15 Derating Curve with Heatsink




Efficiency Curve @25°C

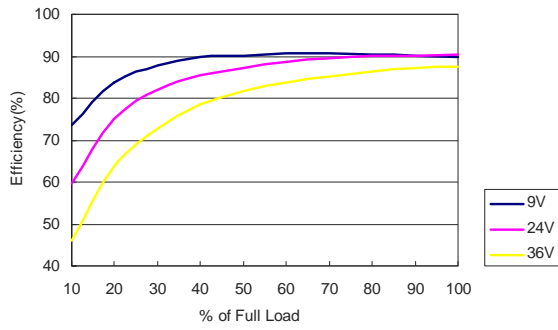


MKWI40-24S033 Efficiency vs Load Current

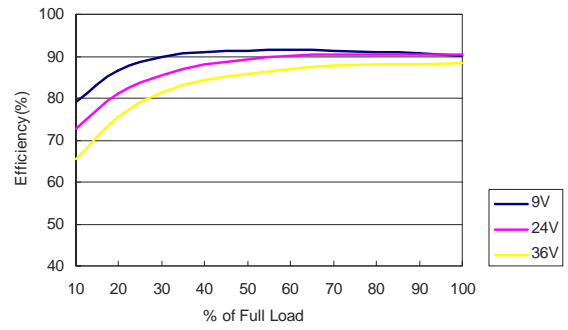


MKWI40-24S05 Efficiency vs Load Current

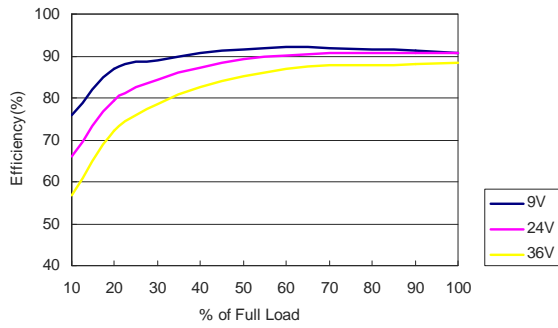


MKWI40-24S12 Efficiency vs Load Current

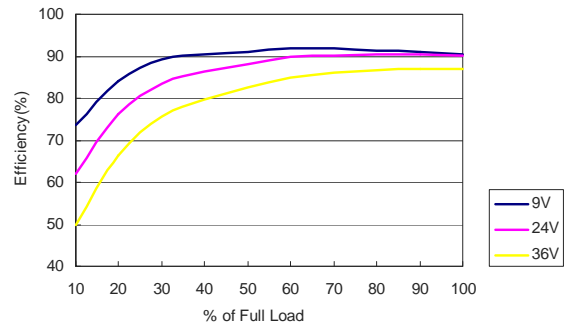

MKWI40-24S15 Efficiency vs Load Current

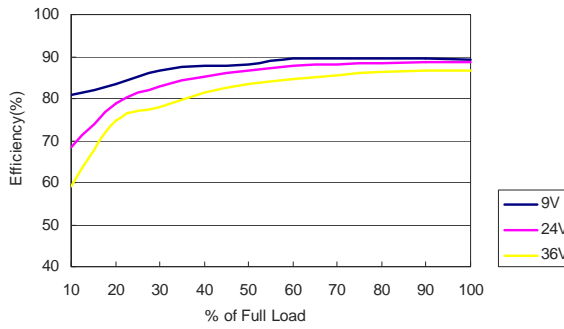


MKWI40-24D12 Efficiency vs Load Current

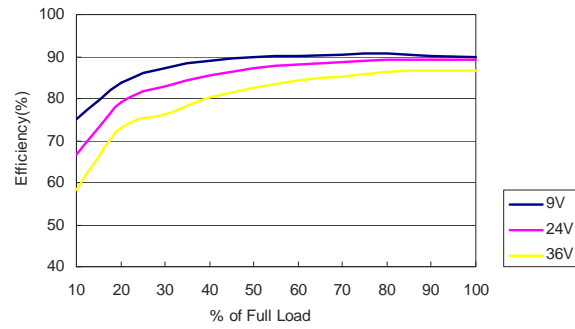


MKWI40-24D15 Efficiency vs Load Current




Efficiency Curve @25°C

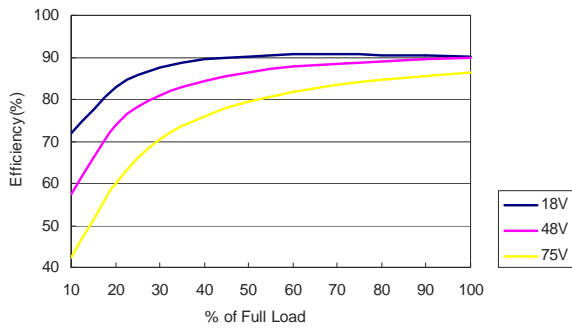


MKWI40-48S033 Efficiency vs Load Current

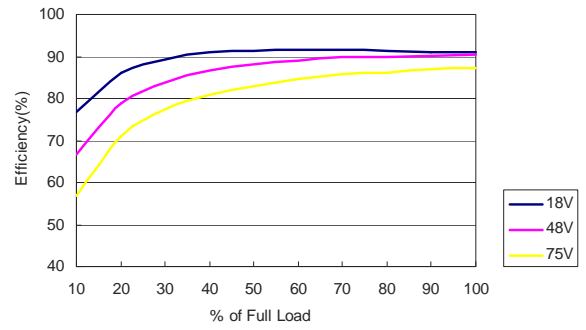


MKWI40-48S05 Efficiency vs Load Current

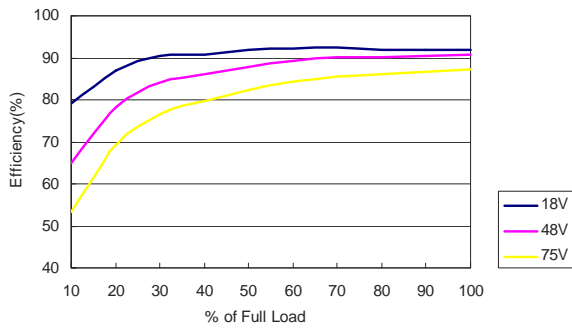


MKWI40-48S12 Efficiency vs Load Current

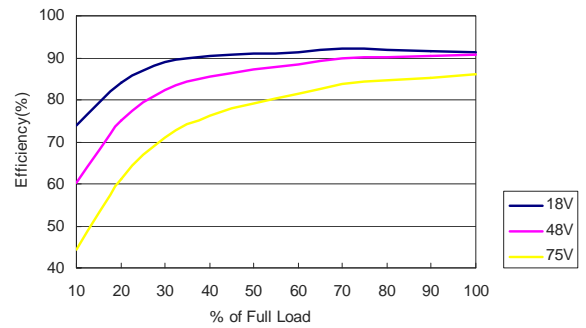

MKWI40-48S15 Efficiency vs Load Current

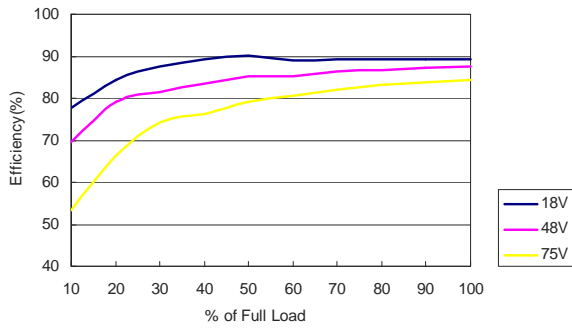

MKWI40-48D12 Efficiency vs Load Current

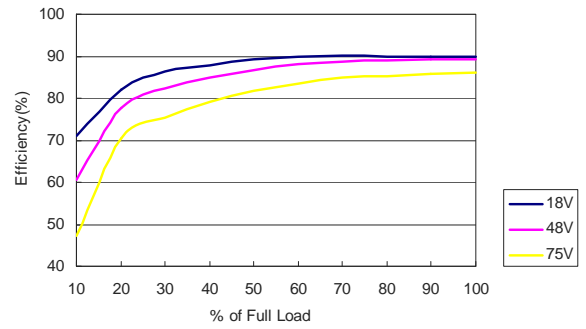


MKWI40-48D15 Efficiency vs Load Current



Notes

- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 Ripple & Noise measurement bandwidth is 20 MHz, measured with a 1µF M/C and a 10µF T/C.
- 4 All DC/DC converters should be externally fused at the front end for protection.
- 5 Other input and output voltage may be available, please contact factory.
- 6 To order the converter with heatsink, please add a **suffix -HS** (e.g.MKWI40-12S05-HS) to order code.
- 7 To order the converter without Remote On/Off function, please add a **suffix -N** (e.g.MKWI40-12S05-N) to order code.
- 8 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 9 Specifications subject to change without notice.

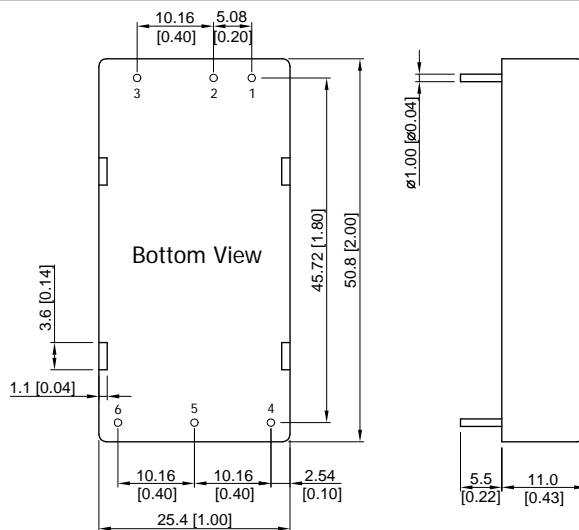
Package Specifications
Mechanical Dimensions

Pin Connections

| Pin | Single Output | Dual Output |
|-----|---------------|---------------|
| 1 | +Vin | +Vin |
| 2 | -Vin | -Vin |
| 3 | Remote On/Off | Remote On/Off |
| 4 | +Vout | +Vout |
| 5 | -Vout | Common |
| 6 | Trim | -Vout |

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.25 (X.XX±0.01)
X.XX±0.13 (X.XXX±0.005)
- ▶ Pin diameter $\varnothing 1.0 \pm 0.05$ (0.04±0.002)

Physical Characteristics
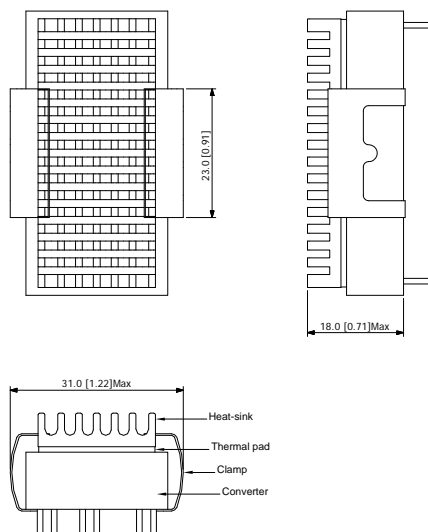
| | |
|---------------|---|
| Case Size | : 50.8x25.4x11mm (2.0x1.0x0.43 inches) |
| Case Material | : Aluminium Alloy, Black Anodized Coating |
| Base Material | : FR4 PCB (flammability to UL 94V-0 rated) |
| Pin Material | : Copper Alloy with Gold Plate Over Nickel Underplate |
| Weight | : 30g |

Heatsink (Option -HS)

Physical Characteristics



| | |
|-------------------|--------------------------|
| Heatsink Material | : Aluminum |
| Finish | : Black Anodized Coating |
| Weight | : 9g |

- ▶ The advantages of adding a heatsink are:
 1. To help heat dissipation and increase the stability and reliability of DC/DC converters at high operating temperature atmosphere.
 2. To upgrade the operating temperature of DC/DC converters, please refer to Derating Curve.



EMI-Filter to meet EN 55022, class A; FCC part 15 ,level A

Conducted and radiated emissions EN55022 Class A

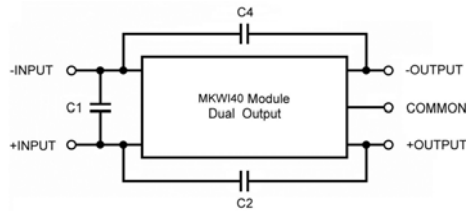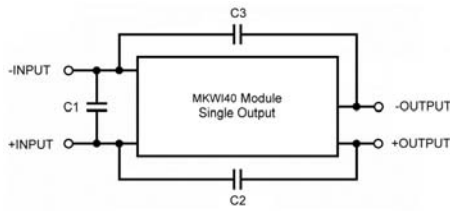


| | | |
|----------|---------------------------|----------------------------|
| Part No. | MKWI40-24SXX | MKWI40-48SXX |
| C1 | 4.7 μ F/50V 1812 MLCC | 2.2 μ F/100V 1812 MLCC |
| C2&C3 | 1000pF/2KV 1808 MLCC | 1000pF/2KV 1808 MLCC |

| | | |
|----------|---------------------------|----------------------------|
| Part No. | MKWI40-24DXX | MKWI40-48DXX |
| C1 | 4.7 μ F/50V 1812 MLCC | 2.2 μ F/100V 1812 MLCC |
| C2&C4 | 1000pF/2KV 1808 MLCC | 1000pF/2KV 1808 MLCC |

External Output Trimming

Output can be externally trimmed by using the method shown below

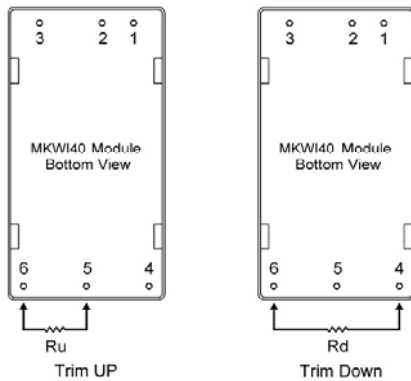

MKWI40-XXS033 Trim Table

| Trim down | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
|-----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|-------|
| Vout= | Vox0.99 | Vox0.98 | Vox0.97 | Vox0.96 | Vox0.95 | Vox0.94 | Vox0.93 | Vox0.92 | Vox0.91 | Vox0.90 | Volts |
| Rd= | 63.59 | 30.28 | 18.19 | 11.95 | 8.13 | 5.56 | 3.70 | 2.31 | 1.21 | 0.34 | KOhms |
| Trim up | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
| Vout= | Vox1.01 | Vox1.02 | Vox1.03 | Vox1.04 | Vox1.05 | Vox1.06 | Vox1.07 | Vox1.08 | Vox1.09 | Vox1.10 | Volts |
| Ru= | 70.50 | 29.28 | 16.87 | 10.90 | 7.38 | 5.06 | 3.42 | 2.20 | 1.25 | 0.49 | KOhms |

MKWI40-XXS05 Trim Table

| Trim down | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
|-----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|-------|
| Vout= | Vox0.99 | Vox0.98 | Vox0.97 | Vox0.96 | Vox0.95 | Vox0.94 | Vox0.93 | Vox0.92 | Vox0.91 | Vox0.90 | Volts |
| Rd= | 45.53 | 20.61 | 12.31 | 8.15 | 5.66 | 4.00 | 2.81 | 1.92 | 1.23 | 0.68 | KOhms |
| Trim up | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
| Vout= | Vox1.01 | Vox1.02 | Vox1.03 | Vox1.04 | Vox1.05 | Vox1.06 | Vox1.07 | Vox1.08 | Vox1.09 | Vox1.10 | Volts |
| Ru= | 36.57 | 16.58 | 9.92 | 6.59 | 4.59 | 3.25 | 2.30 | 1.59 | 1.03 | 0.59 | KOhms |

MKWI40-XXS12 Trim Table

| Trim down | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
|-----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|-------|
| Vout= | Vox0.99 | Vox0.98 | Vox0.97 | Vox0.96 | Vox0.95 | Vox0.94 | Vox0.93 | Vox0.92 | Vox0.91 | Vox0.90 | Volts |
| Rd= | 394.50 | 179.74 | 106.08 | 68.86 | 46.39 | 31.36 | 20.60 | 12.51 | 6.21 | 1.17 | KOhms |
| Trim up | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
| Vout= | Vox1.01 | Vox1.02 | Vox1.03 | Vox1.04 | Vox1.05 | Vox1.06 | Vox1.07 | Vox1.08 | Vox1.09 | Vox1.10 | Volts |
| Ru= | 368.92 | 161.92 | 94.97 | 61.86 | 42.12 | 29.00 | 19.66 | 12.66 | 7.23 | 2.89 | KOhms |

MKWI40-XXS15 Trim Table


| Trim down | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
|-----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|-------|
| Vout= | Vox0.99 | Vox0.98 | Vox0.97 | Vox0.96 | Vox0.95 | Vox0.94 | Vox0.93 | Vox0.92 | Vox0.91 | Vox0.90 | Volts |
| Rd= | 572.67 | 248.63 | 145.60 | 94.97 | 64.87 | 44.92 | 30.72 | 20.10 | 11.86 | 5.28 | KOhms |
| Trim up | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | % |
| Vout= | Vox1.01 | Vox1.02 | Vox1.03 | Vox1.04 | Vox1.05 | Vox1.06 | Vox1.07 | Vox1.08 | Vox1.09 | Vox1.10 | Volts |
| Ru= | 392.98 | 182.12 | 108.73 | 71.43 | 48.85 | 33.71 | 22.86 | 14.69 | 8.33 | 3.23 | KOhms |



Test Setup


Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} (4.7 μ H) and C_{in} (220 μ F, ESR < 1.0 Ω at 100 KHz) to simulate source impedance. Capacitor C_{in} , offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 KHz.

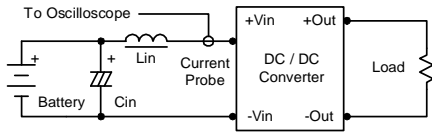

Peak-to-Peak Output Noise Measurement Test

Use a 1 μ F ceramic capacitor and a 10 μ F tantalum capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

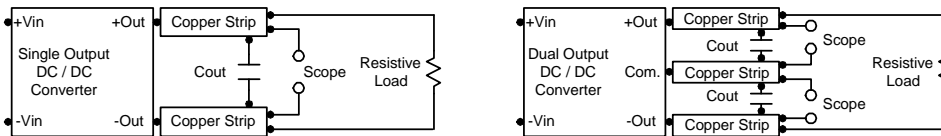

Technical Notes

Remote On/Off

Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is 0V to 1.2V. A logic high is 4.7V to 12V. The maximum sink current at the on/off terminal (Pin 3) during a logic low is -100 μ A. The maximum allowable leakage current of a switch connected to the on/off terminal (Pin 3) at logic high (2.5V to 100V) is 5 μ A.

Overcurrent Protection


To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.

Overvoltage Protection

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage. The OVP level can be found in the output data.


Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 KHz) capacitor of a 10 μ F for the 24V and 48V devices.

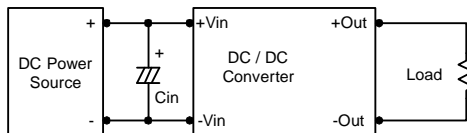

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7 μ F capacitors at the output.

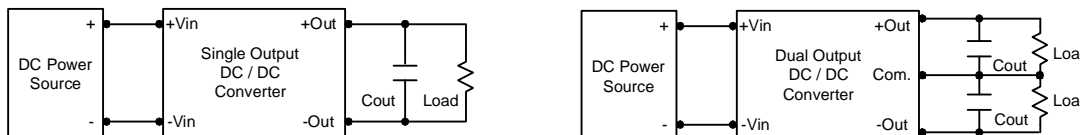

Maximum Capacitive Load

The MKWI40 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105 $^{\circ}$ C. The derating curves are determined from measurements obtained in a test setup.

