



### **FEATURES**

- Short circuit protection options
- UL 60950 recognised
- Single isolated output
- 1kVDC isolation 'Hi Pot Test'
- Wide temperature performance at full 1 watt load, -40°C to 85°C<sup>2</sup>
- Industry standard pinout
- 5V, 12V, 15V & 24V input
- 5V, 9V, 12V and 15V output
- Fully encapsulated with toroidal magnetics
- No external components required
- Pin compatible with CME, CRE1, CRL2, LME, MEE1, MEE3, NKE & NML

### DESCRIPTION

The NME series of DC-DC Converters is particularly suited to isolating and/or converting DC power rails. The galvanic isolation allows the device to be configured to provide an isolated negative rail in systems where only positive rails exist. The wide temperature range guarantees startup from -40°C and full 1 watt output at 85°C<sup>2</sup>. For lower ripple, refer to output ripple reduction section. The NME series offers short circuit protection options (PC) across the operating temperature range. Short circuits of less than  $1\Omega$  cause the converter to enter a 'foldback' limiting mode such that the input current is approximately 95mA for 0505 variant. Protection is continuous and auto-resetting on removal of the short circuit.



# **NME Series**

### Isolated 1W Single Output DC-DC Converters

SELECTION G	UIDE																		
Order Code	t	Output Voltage	Output Current	Input Current at Rated Load		Luau neguraruni-		asinu a inulae	Efficiency (Min)	Efficiency (Typ)	Isolation Canacitance		MTTF	Package Style	200				
	V	V	mA	mA		6 Max.	mV Typ.	р-р Мах.	9	6	pF	MIL.	Tel. Hrs						
			Rec	omn	nenc	led	In	Pro	duc <sup>.</sup>	tion									
NME0505DC	5	5	200	286	12	14	16	40		69	30	3415							
NME0509DC	5	9	111	260	8	9	60	75		77	37	3078							
NME0503DC	5	12	83	256	6.5	7.5	50	65		78	33	2205		DIP					
NME0515DC	5	15	67	250	6	7.5	10	25		80	40	1532							
NME0524DC	5	24	42	248	5.5	7.5	140	180		80	40	1332							
NME0524DC	5	24 5	42 200	240	5.5 12	14	140	40		69	30	3415							
NME0509SC	5	9	111	260	8	9	60	40 75		77	37	3078							
NME0509SC	5	9 12	83	256	o 6.5	9 7.5	50	75 65		78	33	2205		SIP					
NME05123C	5	12	67	250	6.5	7.5	10	25		80	40	1532		JIP					
NME05153C	5	24	42	230	5.5	7.5	140	180		80	40	1552							
NME05243C	12	24 5	42 200	240 117	5.5 8	10	140	30		69	33	2493							
		12				5								סוס					
NME1212DC	12 12	12	83	104	4	э 4	8	20		76	55	1780		DIP					
NME1215DC NME1205SC	12	-	67	110	3 8		40 12	55		75	52	1313 2493							
		5	200	117		10		30		69	33								
NME1209SC	12	9	111	115	5	5.5	60	75		74	48	2311		CID					
NME1212SC	12	12	83	104	4	5	50	65		76	55	1780		SIP					
NME1215SC	12	15	67	111	3	4	40	55		75	52	1313							
NME1515SC	15	15	67	81	2.5	3		150		82	40	001							
NME2405DC	24	5	200	58	8.5	10		150		70	40	201							
NME2412DC	24	12	83	52	3	4		150		80	78	163		DIP	DIP	DIP	DIP		
NME2415DC	24	15	67	51	2.5	3		150		80	79	136							
NME2405SC	24	5	200	58	8.5	10		150		70	40	201		010					
NME2412SC	24	12	83	52	3	4		150		80	78	163		SIP					
NME2415SC	24	15	67	51	2.5	3 • Drot	ootion	150		80	79	136							
NME0505SPC	5	5	200	<b>Short (</b> 255	9.5	12	11	25	75	77	22	2887	47047	SIP					
NME0505DPC	5	5	200	255	9.5	12	11	25	75	77	22		47047						
MILLOJOJDI U	5	5	200	200						11	22	2007	-110-11	DI	Reco	mmended			
					Dis	scor	ntin	uec								ernative			
NME1209DC	12	9	111	115	5	5.5	60	75		74	48	2311		DIP		S1209DC			
NME2409DC	24	9	111	54	4	5		150		75	59	185				S2409DC			
NME2409SC	24	9	111	54	4	5		150		75	59	185		SIP	MEE1	S2409SC			
INPUT CHAR	ACTER	RISTIC																	
Parameter				dition							_	in.	Тур.		Max.	Units			
				tinuou								.5	5.0		5.5				
Voltage range				tinuou		,						).8	12.0		13.2	v			
- onago rango				tinuou								3.5	15		16.5				
		Continuous operation, 24V input types							2	1.6	24		26.4						
Input short circ	uit cur	rent	Sho	Short circuit variants									95			mA			
Input Deflected	ringle		Sho	rt circı	uit var	iants							3		15				
Input Reflected ripple 15V input type											90	mA p-p							

1. Calculated using MIL-HDBK-217 FN2 and Telcordia SR-332 calculation model with nominal input voltage at full load.

2. NME1515SC, NME24XXXC prior to date code X1635 have operating temperature range of 0 to  $70^\circ$ C .

All other variants<sup>3</sup>

3. Excludes 24V input types.

current

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.

48

26

Viso= 1000VDC

## **NME Series**

GΩ

### Isolated 1W Single Output DC-DC Converters

10

<b>OUTPUT CHARACTERIST</b>	TICS				
Parameter	Conditions	Min.	Тур.	Max.	Units
Rated Power	See derating curves			1.0	W
Voltage Set Point Accuracy	See tolerance envelope				
Line regulation	High $V_{IN}$ to low $V_{IN}$ ; All short circuit types		1.15	1.2	%/%
Line regulation	High $V_{IN}$ to low $V_{IN}$ ; All other output types		1.0	1.2	70/ 70
ISOLATION CHARACTER	ISTICS				
Parameter	ameter Conditions		Тур.	Max.	Units
Isolation test voltage	Flash tested for 1 second	1000			VDC

<b>GENERAL CHARACTERIS</b>	TICS				
Parameter	Conditions	Min.	Тур.	Max.	Units
Switching frequency	5V input types		110		
	12V input types		145		
	15V input types		100		kHz
	24V input types		100		
	Short circuit types		91		


TEMPERATURE CHARACTERISTICS							
Parameter	Conditions			Тур.	Max.	Units	
Specification	All output types <sup>1</sup>				85		
Storage					130		
	Non-short circuit types	5V output types			41	°C	
Case Temperature above embient	Non-short circuit types	All other output types <sup>2</sup>			32	U	
Case Temperature above ambient	Short circuit types (DIP)			23			
	Short circuit types (SIP)			24			
Cooling	Free air convection						

#### ABSOLUTE MAXIMUM RATINGS

Resistance

Lead temperature 1.5mm from case for 10 seconds	260°C
Input voltage V <sub>N</sub> , NME05 types	7V
Input voltage V <sub>N</sub> , NME12 types	15V
Input voltage V <sub>N</sub> , NME15 types	18V
Input voltage V <sub>IN</sub> , NME24 types	28V

### TEMPERATURE DERATING GRAPH

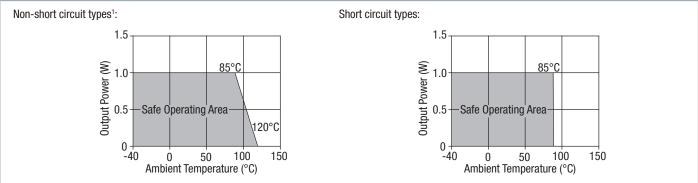

1. NME1515SC, NME24XXXC prior to date code X1635 have operating temperature range of 0 to  $70^\circ\text{C}$  .

2. Excludes 24V input types.

www.murata-ps.com/support

## **NME Series**

### Isolated 1W Single Output DC-DC Converters

### **TECHNICAL NOTES**

#### **ISOLATION VOLTAGE**

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NME series of DC-DC converters are all 100% production tested at their stated isolation voltage. This is 1kVDC for 1 second.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

The NME has been recognised by Underwriters Laboratory for functional insulation, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

#### **REPEATED HIGH-VOLTAGE ISOLATION TESTING**

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The NME series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enamelled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognised parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

#### SAFETY APPROVAL

The NME series has been recognised by Underwriters Laboratory (UL) to UL 60950 for functional insulation in a maximum ambient temperature of 85°C and/or case temperature limit of 100°C. Case temperature measured on the face opposite the pins.

The NME Series of converters are not internally fused so to meet the requirements of UL 60950 an anti-surge input line fuse should always be used with ratings as defined below. NME05xxxxC: 0.5A

NME12xxxxC: 0.25A NME15xxxxC: 0.2A NME24xxxxC: 0.12A

All fuses should be UL recognised and rated at 125V.

File number E151252 applies.

#### **RoHS COMPLIANCE INFORMATION**



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 260°C for 10 seconds. The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The DIP types are Matte Tin over Nickel Preplate. Both types in this series are backward compatible with Sn/Pb soldering systems.

For further information, please visit www.murata-ps.com/rohs

## **NME Series**

### Isolated 1W Single Output DC-DC Converters

### **APPLICATION NOTES**

#### Minimum load


The minimum load to meet datasheet specification is 10% of the full rated load across the specified input voltage range. Lower than 10% minimum loading will result in an increase in output voltage, which may rise to typically double the specified output voltage if the output load falls to less than 5%.

#### Capacitive loading and start up

Typical start up times for this series, with a typical input voltage rise time of 2.2 $\mu$ s and output capacitance of 10 $\mu$ F, are shown in the table below. The product series will start into a capacitance of 47 $\mu$ F with an increased start time, however, the maximum recommended output capacitance is 10 $\mu$ F.

	Start-up time
	μs
NME0505XC	991
NME0509XC	3524
NME0512XC	5630
NME0515XC	7750
NME0524XC	19850
NME1205XC	682
NME1209XC	2102
NME1212XC	4030
NME1215XC	6193
NME1515SC	685
NME2405XC	135
NME2409XC	260
NME2412XC	430
NME2415XC	640
NME0505XPC	350

Typical Start-Up Wave Form



#### Ripple & Noise Characterisation Method

Ripple and noise measurements are performed with the following test configuration.

C1	1µF X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC-DC converter						
C2	$10\mu$ F tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC-DC converter with an ESR of less than $100m\Omega$ at $100$ kHz						
C3	100nF multilayer ceramic capacitor, general purpose						
R1	450Ω resistor, carbon film, ±1% tolerance						
R2	50Ω BNC termination						
T1	3T of the coax cable through a ferrite toroid						
RLOAD	Resistive load to the maximum power rating of the DC-DC converter. Connections should be made via twisted wires						
Measured va	lues are multiplied by 10 to obtain the specified values.						
ifferential Mod	le Noise Test Schematic						
	SUPPLY Input Output						

R LOA

## **NME Series**

Isolated 1W Single Output DC-DC Converters

### **APPLICATION NOTES (continued)**


#### **Output Ripple Reduction**

By using the values of inductance and capacitance stated, the output ripple at the rated load is lowered to 5mV p-p max.

#### **Component selection**

Capacitor: It is required that the ESR (Equivalent Series Resistance) should be as low as possible, ceramic types are recommended. The voltage rating should be at least twice (except for 15V output), the rated output voltage of the DC-DC converter.

Inductor: The rated current of the inductor should not be less than that of the output of the DC-DC converter. At the rated current, the DC resistance of the inductor should be such that the voltage drop across the inductor is <2% of the rated voltage of the DC-DC converter. The SRF (Self Resonant Frequency) should be >20MHz.




		Inductor		Capacitor
	L, µH	SMD	Through Hole	C, μF
NME0505XC	47	82473C	11R473C	4.7uF
NME0509XC	47	82473C	11R473C	1uF
NME0512XC	68	82683C	11R683C	1uF
NME0515XC	100	82104C	11R104C	0.47uF
NME0524XC	100	82104C	11R104C	0.47
NME1205XC	100	82104C	11R104C	4.7uF
NME1209XC	47	82473C	11R473C	1uF
NME1212XC	68	82683C	11R683C	0.47uF
NME1215XC	100	82104C	11R104C	0.47uF
NME1515SC				
NME2405XC				
NME2409XC				
NME2412XC				
NME2415XC				
NME0505XPC	22	82223C	11R223C	1uF

## **NME Series**


Isolated 1W Single Output DC-DC Converters

### **TOLERANCE ENVELOPES**

The voltage tolerance envelope shows typical load regulation characteristics for this product series. The tolerance envelope is the maximum output voltage variation due to changes in output loading.

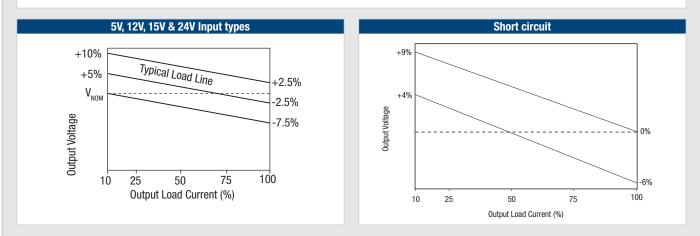

### **EFFICIENCY VS LOAD**

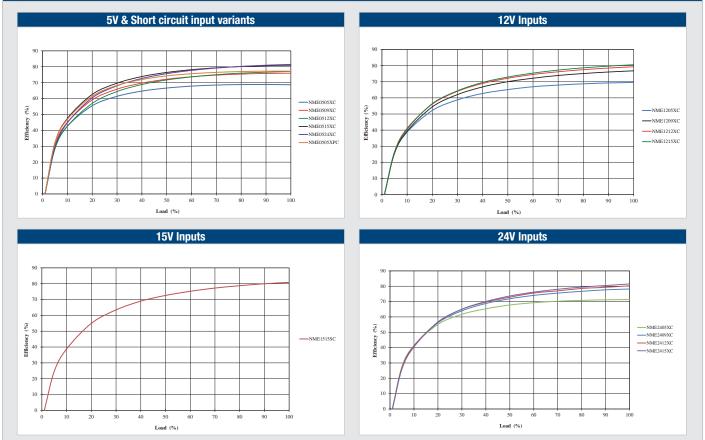


## **NME Series**

### Isolated 1W Single Output DC-DC Converters

### EMC FILTERING AND SPECTRA

### FILTERING

The following table shows the additional input capacitor and input inductor typically required to meet EN 55022 Curve B Quasi-Peak EMC limit, as shown in the following plots. The following plots show positive and negative quasi peak and CISPR22 Average Limit B (pink line) and Quasi Peak Limit B (green line) adherence limits.




C Ceramic capacitor

	Inductor			Capacitor			Capacito		
Part Number	L, µH	SMD	Through Hole	C, µF	Part Number	L, µH	SMD	Through Hole	C, µF
NME0505XC	4.7		13R472C	4.7	NME1215XC				
NME0509XC					NME1515SC				
VME0512XC					NME2405XC	22		13R223C	10
ME0515XC	4.7		13R472C	4.7	NME2409XC				
VME0524XC					NME2412XC	22		13R223C	10
VME1205XC	10		13R103C	1	NME2415XC				
NME1209XC					NME0505XPC	10	82103C	13R103C	1
NME1212XC	10		13R103C	1					

NME0505XC	NME0509XC
NME0512XC	NME0515XC

# **NME Series**

Isolated 1W Single Output DC-DC Converters

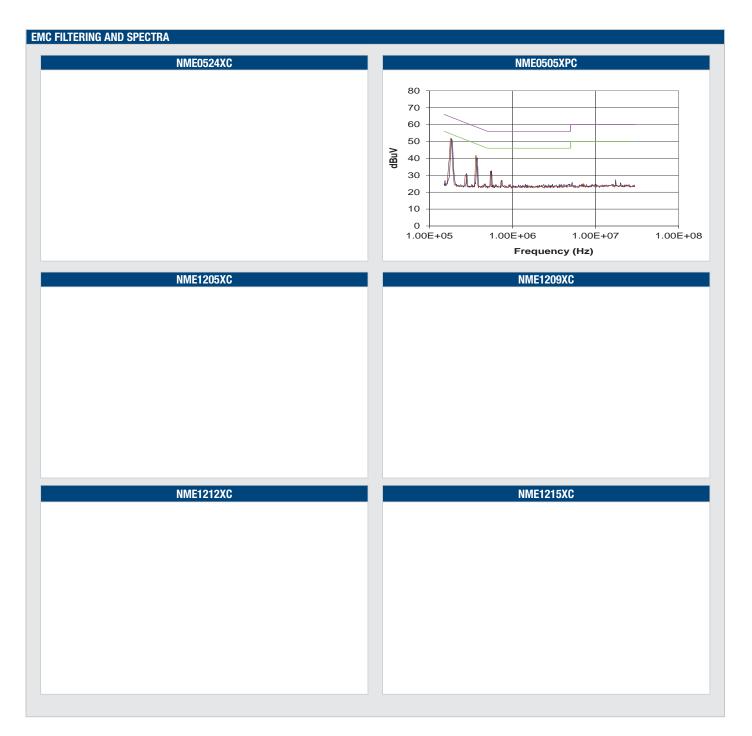


# **NME Series**

Isolated 1W Single Output DC-DC Converters

EMC FILTERING AND SPECTRA	
NME1515SC	NME2405XC
NME2409XC	NME2412XC
NME2415XC	


# **NME Series**

Isolated 1W Single Output DC-DC Converters

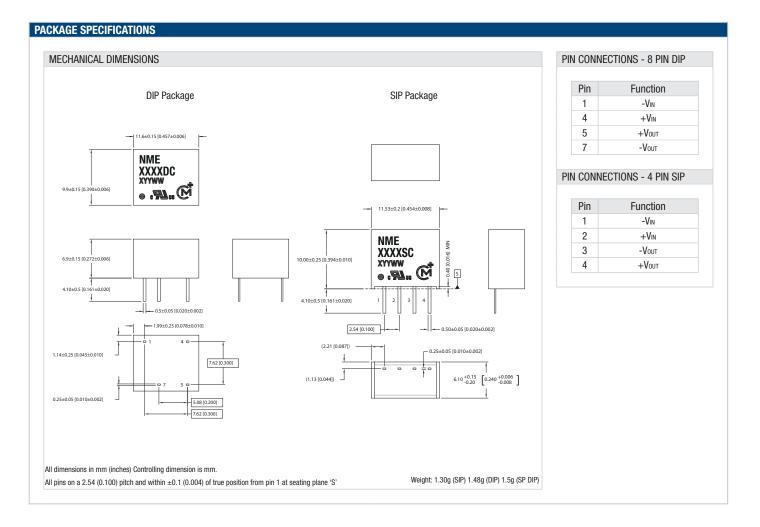

# **NME Series**

Isolated 1W Single Output DC-DC Converters

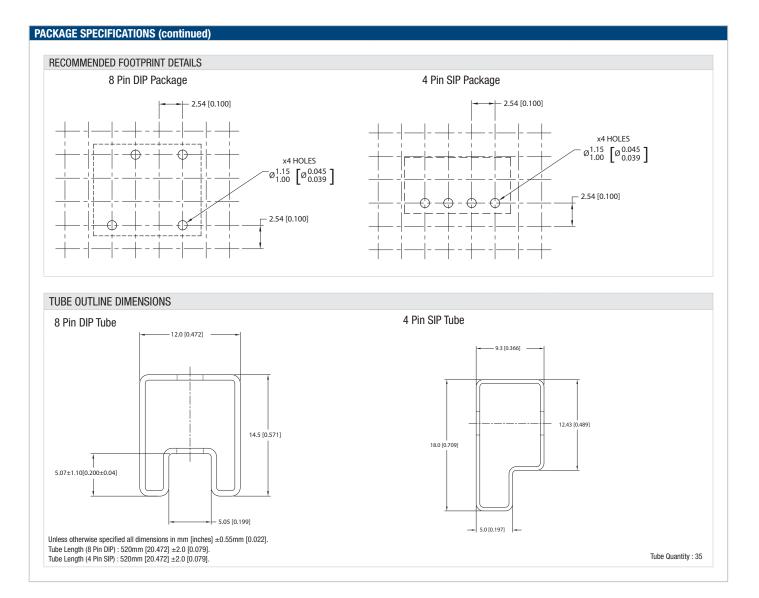



Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

www.murata-ps.com/support