


# DC-DC Converter UNIT

MAU Series ( 1 W UNREGULATED DC-DC CONVERTER )

## FEATURES

- 1000VDC ISOLATION
- EFFICIENCY UP TO 82%
- INTERNAL SMD TECHNOLOGY
- LOW COST
- NO HEATSINK REQUIRED
- UP TO 1W UNREGULATED OUTPUT POWER
- DUAL IN LINE PACKAGE
- 100% BURNED IN
- MTBF > 2,000,000 HOURS

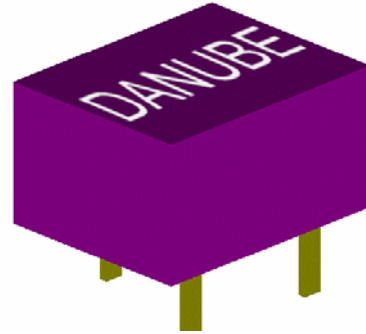

### ● OUTPUT SPECIFICATIONS

Voltage Setpoint Accuracy	+/-2% max
Temperature Coefficient	+/-0.03%/°C
Ripple & Noise (20MHz BW)	100mVp-p max
Line Regulation <sup>1</sup>	+/-1.2% max
Load Regulation <sup>2</sup>	+/-8% max
Short Circuit Protection	Momentary

### ● ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-25°C to +71°C
Storage Temperature	-55°C to +125°C
Cooling	Free-Air Convection

ALL SPECIFICATIONS TYPICAL AT NOMINAL LINE, FULL LOAD , AND 25 °C UNLESS OTHERWISE NOTED.

### ● INPUT SPECIFICATIONS

Input Voltage Range	+/-10% max
Input Filter	Capacitor Type


### ● GENERAL SPECIFICATIONS

Efficiency	70%-82%
Isolation Voltage <sup>3</sup>	1000 VDC min
Isolation Resistance	10 <sup>9</sup> ohms min
Switching Frequency	100 KHz min
Isolation Capacitance	80pF max
MTBF	2,000,000 Hours
Weight	1.7g Typ
Case Material	Non-Conductive Plastic
Case Size	12.7mm*10.16mm*6.87mm

<sup>1</sup> Line Regulation is for a 1.0% change in input Voltage.

<sup>2</sup> Load Regulation is for output load current change from 20% to 100%.

<sup>3</sup> For 60 seconds




# DC-DC Converter UNIT

MAU Series ( 1 W UNREGULATED DC-DC CONVERTER )

## ● SELECTION GUIDE 1W OUTPUT

MODEL NUMBER	INPUT VOLTAGE (VDC)	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (mA)	INPUT CURRENT(mA)		EFF (%)	ISOLATION (VDC)
				FULL LOAD	NO LOAD		
MAUS-0505	5	5	200	260	26	77	1000
MAUS-0509	5	9	110	260	27	77	1000
MAUS-0512	5	12	84	253	26	79	1000
MAUS-0515	5	15	67	253	28	79	1000
MAUS-1205	12	5	200	107	11	78	1000
MAUS-1209	12	9	110	105	11	79	1000
MAUS-1212	12	12	84	102	11	82	1000
MAUS-1215	12	15	67	102	12	82	1000
MAUS-2405	24	5	200	54	8	77	1000
MAUS-2409	24	9	110	54	8	77	1000
MAUS-2412	24	12	84	54	8	77	1000
MAUS-2415	24	15	67	52	7	80	1000
MAUS-4805	48	5	200	27	4	76	1000
MAUS-4809	48	9	110	27	4	77	1000
MAUS-4812	48	12	84	27	4	77	1000
MAUS-4815	48	15	67	26	4	79	1000



*Note: Other input to output voltages may be available. Please contact factory.*





# DC-DC Converter UNIT


MAU Series ( 1 W UNREGULATED DC-DC CONVERTER )

## MECHANICAL DIMENSIONS & RECOMMENDED FOOTPRINT DETAILS

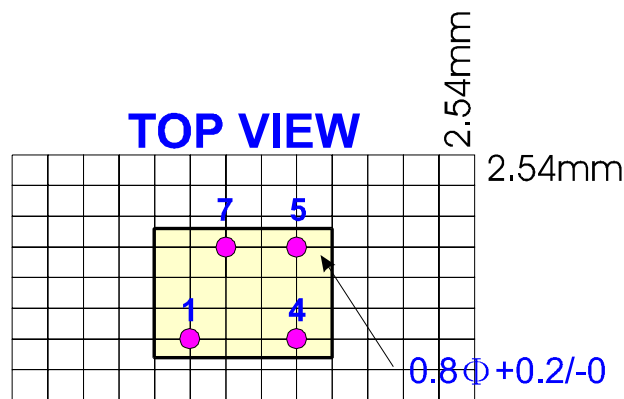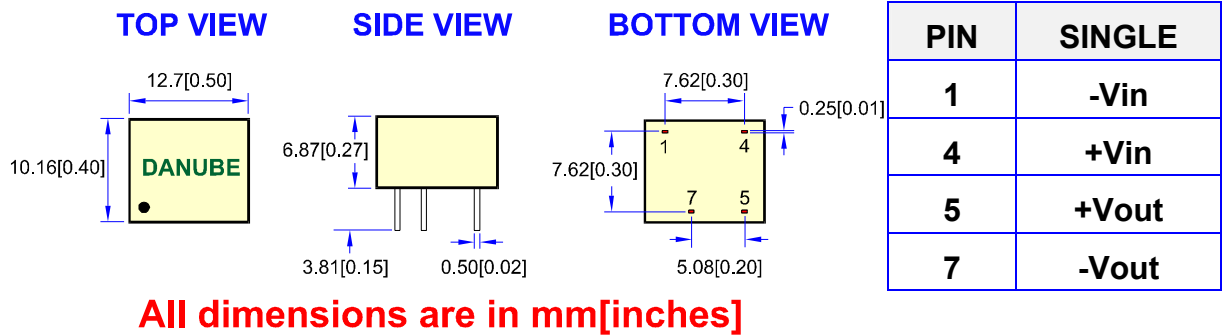

## SIMPLIFIED SCHEMATIC • TYPICAL APPLICATIONS

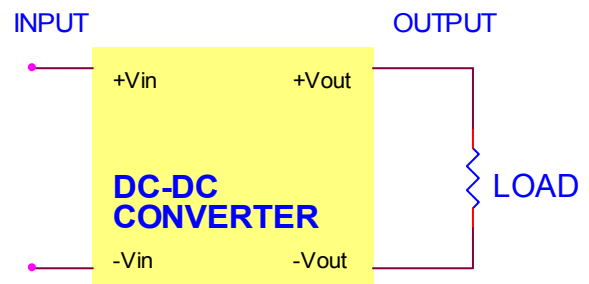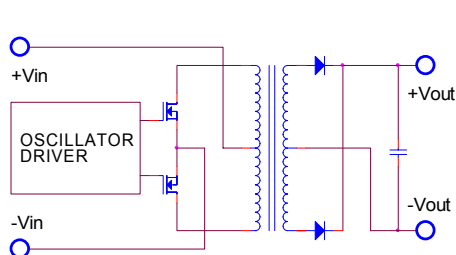




# DC-DC Converter UNIT

MAU Series ( 1 W UNREGULATED DC-DC CONVERTER )


## TYPICAL PERFORMANCE CURVES

Specifications typical at  $t_a=25^{\circ}\text{C}$  , nominal input voltage , rated output current unless otherwise specified.


### VOUT VS LOAD(5Vout Models)

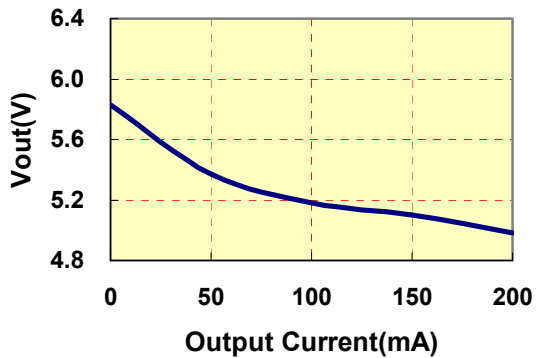


### VOUT VS LOAD(9Vout Models)

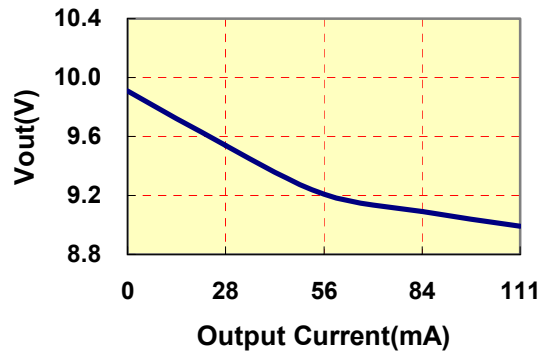


### VOUT VS LOAD(12Vout Models)

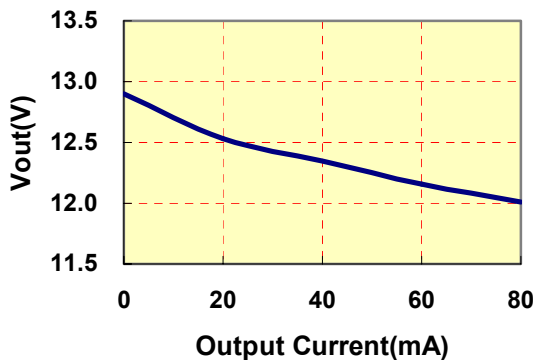


### VOUT VS LOAD(15Vout Models)

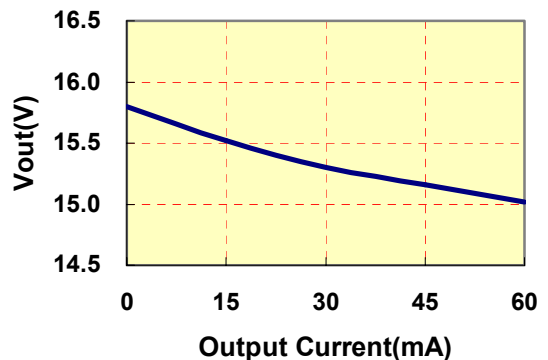


### EFFICIENCY VS LOAD

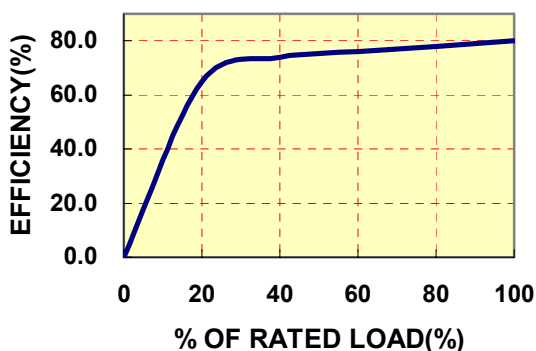

### DERATING CURVE

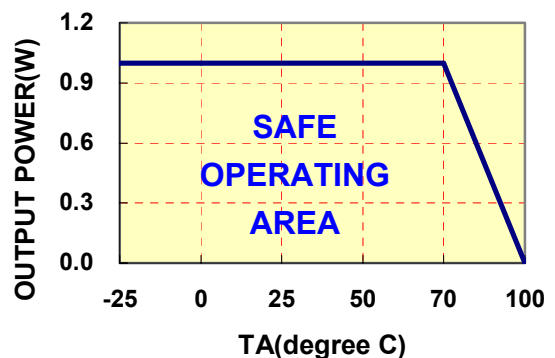



# DC-DC Converter UNIT

---

MAU Series ( 1 W UNREGULATED DC-DC CONVERTER )

---

## MAU SERIES APPLICATION NOTES:

### EXTERNAL CAPACITANCE REQUIREMENTS:

*Output filtering is required for operation. A minimum of 10uF is needed. Output capacitance may be increased for additional filtering, not to exceed 220uF.*

*To meet the reflected ripple requirements of the converter, an input impedance of less than 0.5 ohm from DC to 250KHz is required.*

### Negative Outputs:

*A negative output voltage may be obtained by connecting the +OUT to circuit ground and connecting –OUT as the negative output.*

---

---

### FOR MORE INFORMATION CALL:

#### **Power Systems – The Power Solution**

Ilfeld-Auenstein ( Germany ) Dörnet 8    Tel: + 49 / 70 62 / 67 59 – 6    Fax: + 49 / 70 62 / 67 59 -80

E-mail: [Info@Power-Systems.de](mailto:Info@Power-Systems.de)    Home Page: [www.Power-Systems.de](http://www.Power-Systems.de)

---

---