

Features

- Wide 2 : 1 Input Voltage Range(9~18V,18~36V,36~75V)
- Remote On/Off
- Input / Output Isolation Voltage: 3.0kVDC
- Extended Operating Temperature Range: -40°C to +85°C
- Output Short Circuit Protection:
Continuous & Auto Recovery
- Over Voltage Protection: Clamp Mode
- Shielded Metal Case with Insulated Baseplate
- Lead Free Design, RoHS Compliant
- 24pin DIP Package with Industry-Standard Footprint
- Customer Design Available



Description

The BOB3H3 Series are isolated 3W DC/DC converters. Designed with highly efficiency, allow the operating temperature range of these units to be -40°C to +85°C in a 24 pin DIP package with industry-standard footprint. Further features include wide 2 : 1 input voltage range, remote on/off control, short-circuit protection and over voltage protection.

Applications

These converters are well suitable for battery operated equipment, measurement equipment, telecom, wireless network, Industry control system, everywhere where isolated, tightly regulated voltages and compact size are required.

Technical Specification

All specifications are typical at nominal input, full load and 25°C unless otherwise stated.

| Model Number | Input Voltage Range | Output Voltage (V) | Output Current (mA) | | Input Current (mA) | | Eff. (%) | Capacitive Load, max. (uF) |
|--------------|-------------------------|--------------------|--------------------------|------------|--------------------|-----------|----------|----------------------------|
| | | | Min. Load ⁽¹⁾ | Full. Load | No Load | Full Load | | |
| BOB3-12S0H3 | 9~18V Nominal:12Vdc | 3.3 | 23 | 750 | 14 | 281 | 77 | 820 |
| BOB3-12S1H3 | | 5 | 0 | 600 | 21 | 333 | 79 | 680 |
| BOB3-12S2H3 | | 12 | 0 | 250 | 24 | 325 | 81 | 182 |
| BOB3-12S3H3 | | 15 | 0 | 200 | 25 | 329 | 80 | 100 |
| BOB3-12D1H3 | | ±5 | 2 | ±300 | 21 | 329 | 80 | 330 |
| BOB3-12D2H3 | | ±12 | 0 | ±125 | 27 | 325 | 81 | 82 |
| BOB3-12D3H3 | | ±15 | 0 | ±100 | 35 | 329 | 80 | 47 |
| BOB3-24S0H3 | 18~36V Nominal:24Vdc | 3.3 | 23 | 750 | 8 | 138 | 79 | 820 |
| BOB3-24S1H3 | | 5 | 0 | 600 | 10 | 164 | 80 | 680 |
| BOB3-24S2H3 | | 12 | 0 | 250 | 12 | 160 | 82 | 182 |
| BOB3-24S3H3 | | 15 | 0 | 200 | 14 | 162 | 81 | 100 |
| BOB3-24D1H3 | | ±5 | 2 | ±300 | 11 | 164 | 80 | 330 |
| BOB3-24D2H3 | | ±12 | 0 | ±125 | 16 | 160 | 82 | 82 |
| BOB3-24D3H3 | | ±15 | 0 | ±100 | 17 | 162 | 81 | 47 |
| BOB3-48S0H3 | 36~75V Nominal:48Vdc | 3.3 | 23 | 750 | 5 | 71 | 77 | 820 |
| BOB3-48S1H3 | | 5 | 0 | 600 | 7 | 84 | 78 | 680 |
| BOB3-48S2H3 | | 12 | 0 | 250 | 8 | 82 | 80 | 182 |
| BOB3-48S3H3 | | 15 | 0 | 200 | 8 | 82 | 80 | 100 |
| BOB3-48D1H3 | | ±5 | 2 | ±300 | 9 | 83 | 79 | 330 |
| BOB3-48D2H3 | | ±12 | 0 | ±125 | 10 | 82 | 80 | 82 |
| BOB3-48D3H3 | | ±15 | 0 | ±100 | 12 | 82 | 80 | 47 |

Input Specifications

| | | |
|--|---|---|
| | 12V nominal input | 9-18V |
| Input Voltage | 24V nominal input | 18-36V |
| | 48V nominal input | 36-75V |
| Input filter | | Pi Type |
| | 12V input | 25V |
| Input surge voltage (100ms max.) | 24V input 48V input | 50V 100V |
| Input reflected ripple current | Nominal Vin and full load | 86mA _{p-p} max. |
| Start up time | Nominal Vin and constant resistive load | 1020ms max. |
| Remote ON/OFF | Converter: ON Converter: OFF | Open or 3.5V < V _r < 12V Short ⁽⁴⁾ or 0V < V _r < 1.2V |
| Sourcing current of remote control pin | Nominal Vin | < 0.2 mA |
| Idle input current (at Remote OFF state) | Nominal Vin | < 2.5 mA |

Environmental Specifications

| | | |
|-------------------------------|--------------------------------|--|
| Operating ambient temperature | -40°C to +85°C (with derating) | |
| Maximum case temperature | +100°C | |
| Storage temperature range | -55°C to +105°C | |
| Relative humidity | 5% to 95% RH | |
| Temperature coefficient | ±0.02% / °C max. | |

Output Specifications

| | | |
|--|---------------------------------------|--------------------------|
| Output power | 3 Watts max. | |
| Voltage accuracy | Full load and nominal Vin | |
| Minimum load | See table | |
| Line regulation | LL to HL at full load | |
| | 25% load to full load | Single |
| Load Regulation | Balanced load | Dual |
| | Unbalanced load 25% to 100% full load | ±3% |
| Ripple and Noise | 20MHz bandwidth | 60mV _{p-p} max. |
| | 3.3V _{out} models | 3.9V |
| Over voltage protection (Zener Diode Clamp) | 5V _{out} models | 6.2V |
| | 12V _{out} models | 15V |
| | 15V _{out} models | 18V |

| | | |
|----------------------|---------------------------------|--|
| Capacitive load | See table | |
| Over load protection | % of full load at nominal input | |


| | | |
|----------------------------------|--------------------------------|-------------------------|
| Short circuit protection | Continuous, automatic recovery | |
| Transient response settling time | 50% load step change | |
| Transient response over shoot | di/dt=0.8A/μs | ≤ ±3% of V _o |

General Specifications


| | | |
|------------|---------------|-----------|
| Efficiency | Nominal input | See table |
|------------|---------------|-----------|

| | | |
|--------------------------------|---|------------------------|
| Isolation voltage | Input to output | 3000VDC |
| Isolation resistance | 500 VDC | 10^9 Ohms min. |
| Isolation capacitance | | 280pF typ. |
| Switching frequency | | 300kHz typ. |
| Reliability, calculated MTBF | | 2.53×10^6 Hrs |
| Physical Specifications | | |
| Case material | Nickel-coated copper | |
| Base material | Non-conductive black plastic | |
| Potting material | Silicon rubber (UL94V-0) | |
| Dimensions | 1.25 × 0.80 × 0.40 Inch (31.75 × 20.32 × 10.16 mm) | |
| Weight | 17.2g (0.59oz) typ. | |


BOB3H3 Series
Power Derating Curve(5)


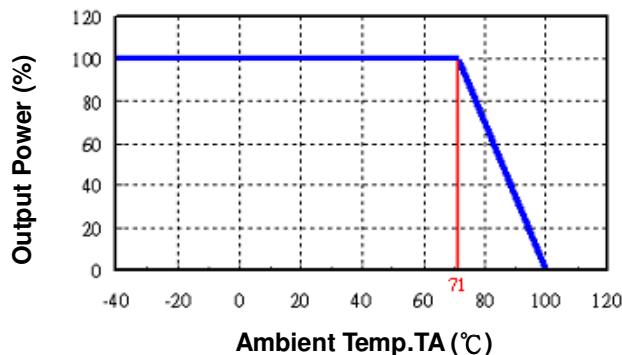


BOB3-48S1H3
Input voltage vs. Efficiency

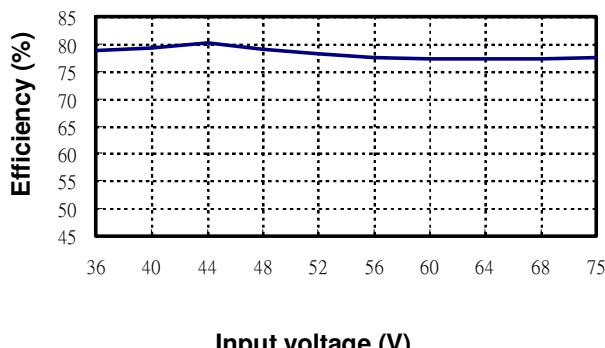


BOB3-48S1H3
Output Current vs. Efficiency

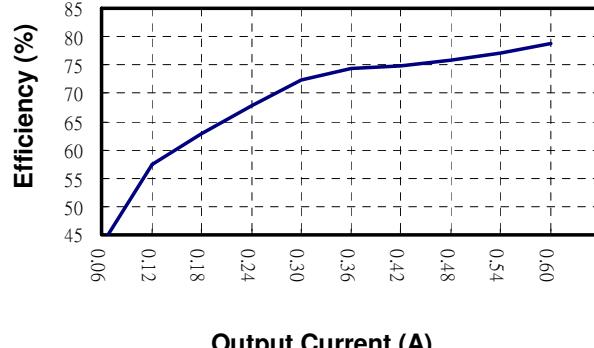

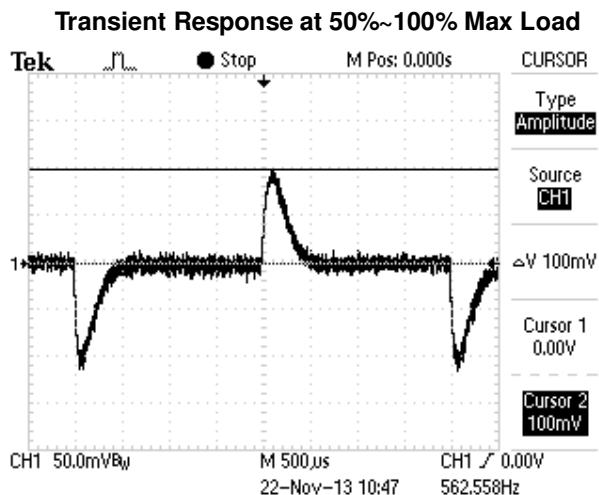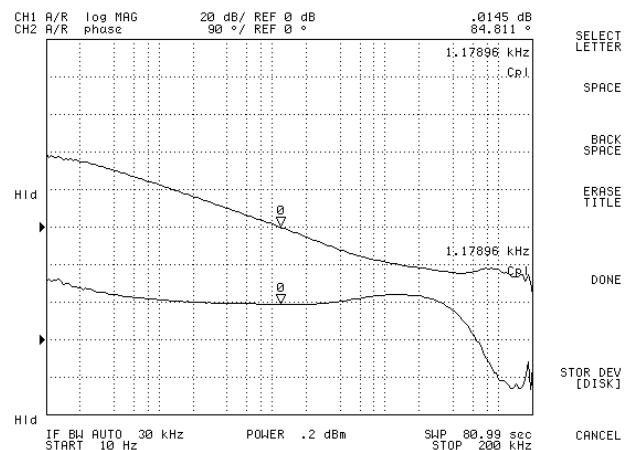BOB3-48S1H3

BOB3-48S1H3
Loop Gain & Phase at Vi=48V, Full Load

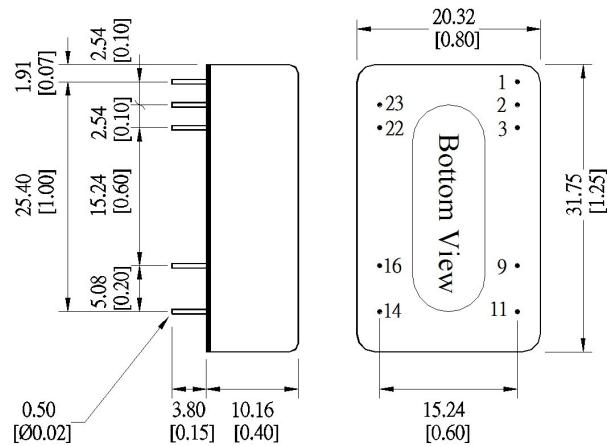Note

1. Io below this value will not damage these converters, however, they may not meet all listed specifications.
2. Typical value, tested at nominal input and full load.
3. For each output.
4. Short to -Vin (Pin 2,3).
5. Based on BOB3-48S1H3.

Mechanical Dimensions


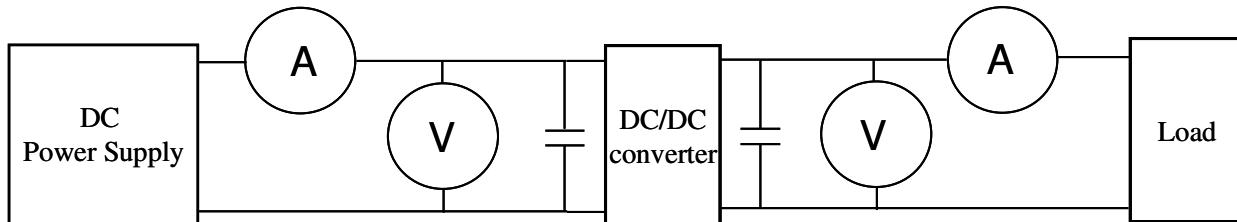
Unit: mm [inch]
Tolerance: $\pm 0.5[0.02]$

| Pin Assignment | | |
|----------------|---------------|---------------|
| Pin | Single | Dual |
| 1 | Remote On/Off | Remote On/Off |
| 2 | -Vin | -Vin |
| 3 | -Vin | -Vin |
| 9 | No pin | Common |
| 11 | No function | -Vout |
| 14 | +Vout | +Vout |
| 16 | -Vout | Common |
| 22 | +Vin | +Vin |
| 23 | +Vin | +Vin |

Specifications subject to change without notice.

Test Configurations

All specifications are typical at nominal input, full load and 25°C unless otherwise stated.



- ◎ DC Power Supply: It offers a wide voltage and current range precisely.
- ◎ Current meter (A): Accuracy → 200µA ~ 200mA 4 ranges_{+(0.2% rdg + 2 digits)}
- 2000mA ~ 20A 2 ranges_{+(0.3% rdg + 2 digits)}.
- ◎ Voltage meter (V): Accuracy → $\pm(0.03\% \text{ rdg} + 4 \text{ digits})$.
- ◎ Load: At full load.
- ◎ Wires: The resistance of the wires must be small.

1. Input voltage range: Narrow input voltage range ($\pm 10\%$)、wide input voltage range (2:1 and 4:1)。

EX: Narrow input voltage range ($\pm 10\%$)

| | | |
|-------------------|---|------------|
| 5V nominal input | → | 4.5~5.5V |
| 12V nominal input | → | 10.8~13.2V |
| 24V nominal input | → | 21.6~26.4V |

Wide input voltage range 2:1

| | | |
|-------------------|---|--------|
| 5V nominal input | → | 4.5~9V |
| 12V nominal input | → | 9~18V |
| 24V nominal input | → | 18~36V |
| 48V nominal input | → | 36~75V |

Wide input voltage range 4:1 (W)

| | | |
|-------------------|---|--------|
| 24V nominal input | → | 9~36V |
| 48V nominal input | → | 18~75V |

2. Input power :

$$P_{in} = V_{in} \times I_{in}$$

V_{in} : Input voltage

I_{in} : Input current

3. Output power :

$$P_{out} = V_{out} \times I_{out}$$

V_{out} : Output voltage

I_{out} : Output current

4. Efficiency :

$$\text{Efficiency} = \frac{P_{out}}{P_{in}} \times 100\%$$

P_{out}: Output power
P_{in}: Input power

5. Voltage accuracy:

$$\left| \frac{V_{out}-V_{out(\text{nominal})}}{V_{out}} \right| \times 100\%$$

V_{out} : Output voltage

V_{out(nominal)} : Nominal output voltage

6. Line regulation: (1) Wide input voltage range and regulated output voltage series.

$$\left| \frac{V_{out(LL)} - V_{out(HL)}}{V_{out(LL)}} \right| \times 100\% \quad \begin{array}{l} LL: \text{Low Line input voltage} \\ HL: \text{High Line input voltage} \end{array}$$

(2) Narrow input voltage range ($\pm 10\%$) and unregulated output voltage series.

$$\text{Line regulation} = \left| \frac{\Delta V_{out}}{\Delta V_{in}} \right|$$

$$\Delta V_{out} = \frac{V_{out(+10\%)} - V_{out(-10\%)}}{V_{out}} \times 100\%$$

$V_{out(+10\%)}$: Output voltage at $V_{in} = 1.1 \times V_{in(\text{nominal})}$ & full load

$V_{out(-10\%)}$: Output voltage at $V_{in} = 0.9 \times V_{in(\text{nominal})}$ & full load

V_{out} : Output voltage at $V_{in} = V_{in(\text{nominal})}$ & full load

$$\Delta V_{in} = \frac{V_{in(+10\%)} - V_{in(-10\%)}}{V_{in(\text{nominal})}} \times 100\%$$

$V_{in(+10\%)}$: Input voltage = $1.1 \times V_{in(\text{nominal})}$

$V_{in(-10\%)}$: Input voltage = $0.9 \times V_{in(\text{nominal})}$

$V_{in(\text{nominal})}$: Nominal Input voltage


7. Load regulation :

$$\left| \frac{V_{out(FL)} - V_{out(NL)}}{V_{out(FL)}} \right| \times 100\%$$


$V_{out(FL)}$: Output voltage at full load

$V_{out(NL)}$: Output voltage at 25% full load or 10% full load

8. Ripple and Noise: as shown below. The bandwidth is 0-20MHz.

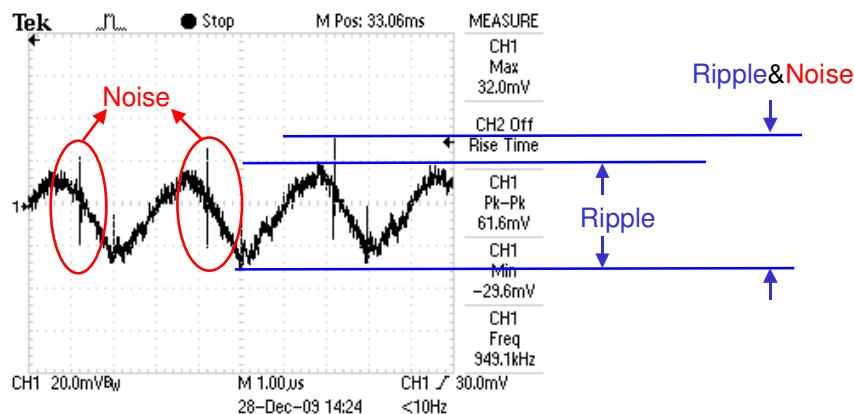


Output Ripple&Noise measurement test circuit: as shown below.

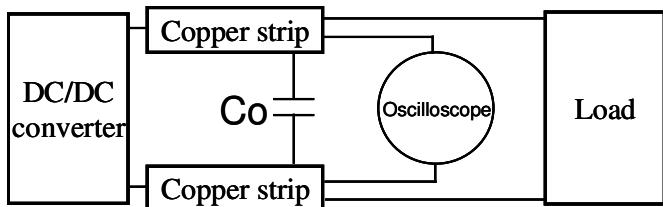

Co: usually 0.47uF.

9. [Temperature derating curve](#): The DC-DC converter will operate over a wider temperature range if less power is drawn from the output and the device is already running. The temperature derating curve shows the operating power-temperature range. As shown below.

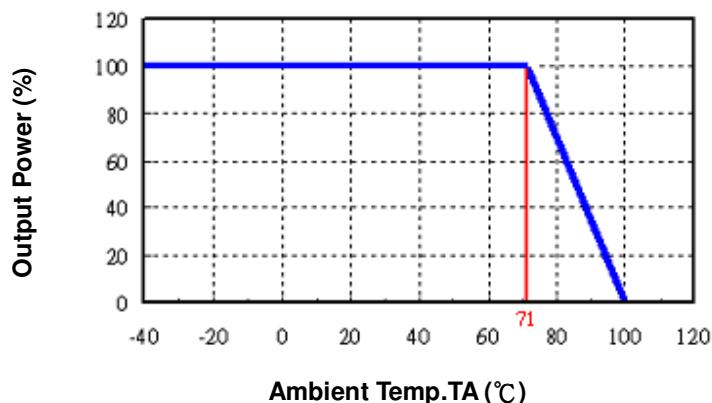

10. [Switching frequency](#): The nominal operating frequency of the DC-DC converters.

11. [Input to output isolation](#): The dielectric breakdown strength test between input and output circuits. This is the isolation voltage the device is capable of withstanding for a specified time, usually 1 second or 1 minute.