PSDV-xxxxELF

PSD-SERIES

Rev.12-2009

- ✓ 0.25 Watt
- ✓ Unregulated
- ✓ Single Output
- ✓ SMD Case
- √ 1 kV DC I/O Isolation
- ✓ Low Ripple and Noise



The PSDV-xxxxELF series is a family of cost effective 0.25 W single output DC/DC converters. These converters are in an ultra miniature SMD 8-pin case. Devices are encapsulated. High performance features: 1000VDC input/output isolation, industrial standard pinout, high power density, no heatsink required

All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified

Input Specifications

Voltage Range ± 10%

Output Specifications

Voltage Accuracy ± 5%, typ.
Short Circuit Protection Short Term

Line Regulation

3.3 Vout ± 1.5%, max. (For Vin Change of 1%)

Others ± 1.2%, max. (For Vin Change of 1%)

Others ± 1.2%, max. (For Vin Cha

Load Regulation (10% - 100%) 3.3 Vout 20%, max. 5 Vout 15%, max.

9, 12, 15 Vout 10%, max.

Ripple and Noise (20Mhz bandwidth) 75 mV pk-pk, max.

Temperature Coefficient ± 0.03% / ℃

General Specifications

Efficiency
I/O Isolation Voltage (3 sec.)
I/O Isolation Resistance (Tested at 500 VDC)
Switching Frequency
Humidity
Reliability Calculated MTBF (MIL-HDBK-217F)
See Table
1000 VDC
1000 M Ohm
110 kHz, typ (5, 12 Vin); 500 kHz (24Vin)
95% rel H
> 3500 khrs

Physical Specifications

Case Material Non Conductive Black Plastic (UL94V-0 rated)

Potting Material Epoxy (UL94V-0 rated)

Weight ~ 1.4g, typ.

Environment Specifications

Operating Temperature -40 to +85 ℃ (ambient)

Storage Temperature -55 to +125 °C

Cooling Free Air Convection (10mm distance required)
Soldering Unsuitable for heat steam soldering

RoHS Conform



Selection Guide Single Output


		NDC)	is (NDC)	max. (mA)	t min. (mA)
Order #	Input Voltag	Ontont Notae	Ontont Coureut	Ontont Course Wex (Wy)	Efficiency (%)
SINGLE OUTPUT					
PSDV-053R3ELF	5	3.3	76	8	62
PSDV-0505ELF	5	5	50	5	64
PSDV-0509ELF	5	9	28	3	65
PSDV-0512ELF	5	12	21	2	67
PSDV-0515ELF	5	15	17	2	66
PSDV-1205ELF	12	5	50	5	65
PSDV-1209ELF	12	9	28	3	64
PSDV-1212ELF	12	12	21	2	63
PSDV-1215ELF	12	15	17	2	64
PSDV-2405ELF	24	5	50	5	60
PSDV-2409ELF	24	9	28	3	61
PSDV-2412ELF	24	12	21	2	63
PSDV-2415ELF	24	15	17	2	65

If you need other specifications, please enquire.

Notes:	




Package / Pinning / Derating



All dimensions are typical in millimeters (inches).


- Pin pitch tolerance: +/-0.35 (+/-0.014)
- Case tolerance +/-0.5 (+/-0.02)

Specification may change without notice. PSD-Series single



PIN CONNECTIONS			
#	SINGLE		
1	- Vin		
2	+Vin		
4	- Vout		
5	+Vout		
Others	N.C.		

Reflow:

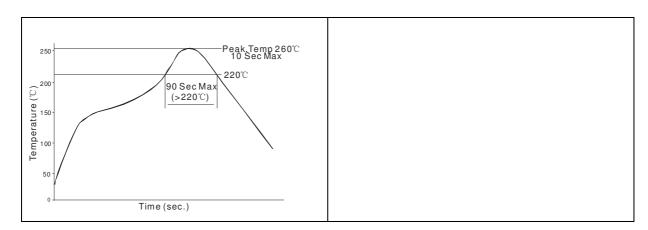




App Notes

Requirement on output load

To ensure this module can operate efficiently and reliably, during operation, the minimum output load is **not less than 10%** of the full load, and that **this product should never be operated under no-load!** If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load.

Recommended testing circuit


If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends if the DC/DC converter, see Figure on the right hand side.



It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a start-up problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (see Table).

Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series.



Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short-circuits. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

No parallel connection or plug and play.