

VA-DD1 Series

1W Unregulated Dual output

Features

- 8 Pin DIL Package
- 1000 VDC Isolation
- Up to 3000 VDC Isolation
- Low Ripple and Noise
- Efficiency up to 85%
- -40 ~ 85°C Operation Temperature Range
- Non-Conductive Black Plastic Case
- EMC Complies With EN55022 Class B



The VA series is a family of cost effective 1W dual output DC-DC converters. These converters achieve low cost and ultra-miniature DIP 8 pin size. Devices are encapsulated using flame retardant resin. The models operate from input voltage of 3.3, 5, 12, 15, 24Vdc with output voltage of ± 3.3 , ± 5 , ± 7.2 , ± 9 , ± 12 , ± 15 , ± 18 , ± 24 Vdc. High performance features include 1000Vdc~3000Vdc input/output isolation, high efficiency operation and output voltage accuracy of $\pm 3\%$ maximum. Standard features include an input range of $\pm 10\%$ tolerance and low output noise and ripple.

All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified

| OUTPUT SPECIFICATIONS | |
|--------------------------------------|--|
| Voltage accuracy | $\pm 3\%$ |
| Line regulation | $\pm 1.2\%$ / Per 1% Vin Change |
| Load regulation | (From 20% to 100% Load) $\pm 10\%$ (Output 3.3V Model) $\pm 20\%$ |
| Ripple & noise (20 MHz bandwidth)(1) | 100mV pk-pk |
| Temperature coefficient | $\pm 0.02\%/^{\circ}\text{C}$ |
| Capacitor load(2) | See table |

| INPUT SPECIFICATIONS | |
|-----------------------------------|------------|
| Voltage Range | $\pm 10\%$ |
| Max. Input Current | See table |
| No-Load Input Current | See table |
| Input Filter | Capacitors |
| Input Reflected Ripple Current(3) | 20mA pk-pk |

| PHYSICAL SPECIFICATIONS | |
|-------------------------|---|
| Case Material | Non-conductive Black Plastic(UL94V-0 rated) |
| Pin Material | $\Phi 0.5\text{mm}$ Brass Solder-coated |
| Potting Material | Epoxy (UL94V-0 rated) |
| Weight | 1.8g |
| Dimensions | 0.50"x0.40"x0.27" |

| ENVIRONMENT SPECIFICATIONS | |
|----------------------------|--------------------------------|
| Operating Temperature | -40°C~85°C(See Derating Curve) |
| Maximum Case Temperature | 100°C |
| Storage Temperature | -40°C~125°C |
| Cooling | Nature Convection |



| ABSOLUTE MAXIMUM RATINGS(4) | |
|--|--------------|
| These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability. | |
| Input Surge Voltage(100mS) | |
| 3.3 Models | 5 Vdc ,max. |
| 5 Models | 7 Vdc ,max. |
| 12 Models | 15 Vdc ,max. |
| 15 Models | 18 Vdc ,max. |
| 24 Models | 28 Vdc ,max. |
| Soldering Temperature (1.5mm from case 10 sec. max.) | 260°C ,max. |

| EMC CHARACTERISTICS | | |
|-------------------------|---------------|------------------|
| Conducted Emissions (6) | EN55022 | CLASS B |
| Radiated Emissions | EN55022 | CLASS B |
| ESD | IEC 61000-4-2 | Perf. Criteria A |
| RS | IEC 61000-4-3 | Perf. Criteria A |
| EFT(7) | IEC 61000-4-4 | Perf. Criteria A |
| Surge(7) | IEC 61000-4-5 | Perf. Criteria A |
| CS | IEC 61000-4-6 | Perf. Criteria A |
| PFMF | IEC 61000-4-8 | Perf. Criteria A |

| GENERAL SPECIFICATIONS | |
|---|----------------|
| Efficiency | See table |
| I/O Isolation Voltage(60 sec) Input/Output | 1000~3000Vdc |
| I/O Isolation Capacitance | 60 pF Typ. |
| I/O Isolation Resistance | 1000M Ohm |
| Switching Frequency | Variable 80kHz |
| Humidity | 95% rel H |
| Reliability Calculated MTBF(MIL-HDBK-217 F) | >1.121 Mhrs |
| Safety Standard : (designed to meet) | IEC 60950-1 |

VA - 1W Unregulated Dual output

PART NUMBER STRUCTURE

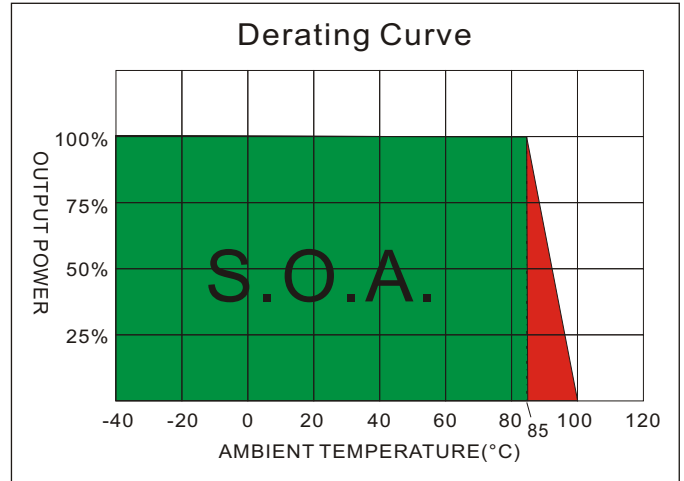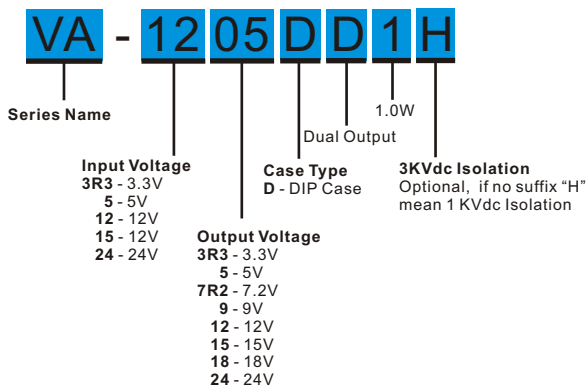

MODEL SELECTION GUIDE

| MODEL NUMBER | INPUT | INPUT Current | | OUTPUT | OUTPUT Current | EFFICIENCY @FL(%) | Capacitor Load(uF) |
|--------------|---------------------|---------------|----------------|---------------|----------------|-------------------|--------------------|
| | Voltage Range (Vdc) | No-Load (mA) | Full Load (mA) | Voltage (Vdc) | Full load (mA) | | |
| VA-3R3R3DD1 | 3.3 | 30 | 489 | ±3.3 | ±152 | 62 | ±100 |
| VA-3R305DD1 | 3.3 | 35 | 481 | ±5 | ±100 | 63 | ±100 |
| VA-3R37R2DD1 | 3.3 | 30 | 481 | ±7.2 | ±69 | 63 | ±100 |
| VA-3R309DD1 | 3.3 | 30 | 466 | ±9 | ±56 | 65 | ±100 |
| VA-3R312DD1 | 3.3 | 32 | 543 | ±12 | ±50 | 67 | ±100 |
| VA-3R315DD1 | 3.3 | 32 | 452 | ±15 | ±33 | 67 | ±100 |
| VA-3R318DD1 | 3.3 | 32 | 439 | ±18 | ±28 | 69 | ±100 |
| VA-3R324DD1 | 3.3 | 32 | 439 | ±24 | ±25 | 69 | ±100 |
| VA-053R3DD1 | 5 | 15 | 299 | ±3.3 | ±152 | 67 | ±100 |
| VA-0505DD1 | 5 | 20 | 270 | ±5 | ±100 | 74 | ±100 |
| VA-057R2DD1 | 5 | 15 | 260 | ±7.2 | ±69 | 77 | ±100 |
| VA-0509DD1 | 5 | 20 | 260 | ±9 | ±56 | 77 | ±100 |
| VA-0512DD1 | 5 | 22 | 300 | ±12 | ±50 | 80 | ±100 |
| VA-0515DD1 | 5 | 20 | 247 | ±15 | ±33 | 81 | ±100 |
| VA-0518DD1 | 5 | 22 | 244 | ±18 | ±28 | 82 | ±100 |
| VA-0524DD1 | 5 | 20 | 300 | ±24 | ±25 | 85 | ±100 |
| VA-123R3DD1 | 12 | 10 | 121 | ±3.3 | ±152 | 69 | ±100 |
| VA-1205DD1 | 12 | 7 | 110 | ±5 | ±100 | 76 | ±100 |
| VA-127R2DD1 | 12 | 15 | 109 | ±7.2 | ±69 | 76 | ±100 |
| VA-1209DD1 | 12 | 15 | 109 | ±9 | ±56 | 78 | ±100 |
| VA-1212DD1 | 12 | 12 | 123 | ±12 | ±50 | 81 | ±100 |
| VA-1215DD1 | 12 | 10 | 102 | ±15 | ±33 | 82 | ±100 |
| VA-1218DD1 | 12 | 15 | 103 | ±18 | ±28 | 81 | ±100 |
| VA-1224DD1 | 12 | 20 | 125 | ±24 | ±25 | 80 | ±100 |
| VA-153R3DD1 | 15 | 10 | 93 | ±3.3 | ±152 | 72 | ±100 |
| VA-1505DD1 | 15 | 10 | 89 | ±5 | ±100 | 75 | ±100 |
| VA-157R2DD1 | 15 | 15 | 89 | ±7.2 | ±69 | 75 | ±100 |
| VA-1509DD1 | 15 | 15 | 87 | ±9 | ±56 | 77 | ±100 |
| VA-1512DD1 | 15 | 5 | 103 | ±12 | ±50 | 78 | ±100 |
| VA-1515DD1 | 15 | 5 | 80 | ±15 | ±33 | 83 | ±100 |
| VA-1518DD1 | 15 | 10 | 85 | ±18 | ±28 | 78 | ±100 |
| VA-1524DD1 | 15 | 10 | 103 | ±24 | ±25 | 78 | ±100 |

Suffix "H" means 3 KVdc isolation

The models listed above is just for standard type. If you need the special specification product, please contact our service member by telephone presented in shortform cover or e-mail to : sales@motien.com.tw


VA - 1W Unregulated Dual output

| MODEL NUMBER | INPUT | INPUT Current | | OUTPUT | OUTPUT Current | EFFICIENCY @FL(%) | Capacitor Load(uF) |
|--------------|---------------------|---------------|----------------|---------------|----------------|-------------------|--------------------|
| | Voltage Range (Vdc) | No-Load (mA) | Full Load (mA) | Voltage (Vdc) | Full load (mA) | | |
| VA-243R3DD1 | 24 | 5 | 60 | ±3.3 | ±152 | 70 | ±100 |
| VA-2405DD1 | 24 | 6 | 56 | ±5 | ±100 | 74 | ±100 |
| VA-247R2DD1 | 24 | 6 | 55 | ±7.2 | ±69 | 76 | ±100 |
| VA-2409DD1 | 24 | 7 | 56 | ±9 | ±56 | 75 | ±100 |
| VA-2412DD1 | 24 | 5 | 62 | ±12 | ±50 | 81 | ±100 |
| VA-2415DD1 | 24 | 5 | 51 | ±15 | ±33 | 81 | ±100 |
| VA-2418DD1 | 24 | 7 | 53 | ±18 | ±28 | 78 | ±100 |
| VA-2424DD1 | 24 | 7 | 64 | ±24 | ±25 | 78 | ±100 |


Suffix "H" means 3 KVdc isolation

NOTE


1. Ripple/Noise measured with 20MHz bandwidth.
2. Tested by minimal Vin and constant resistive load.
3. Measured Input reflected ripple current with a simulated source inductance of 12uH.
4. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
5. Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.
6. Input filter components are required to help meet conducted emission class B, which application refer to the EMI Filter of design & feature configuration.
7. An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5.
The filter capacitor Motien suggest: Nippon - chemi - con KY series, 470uF/100V.

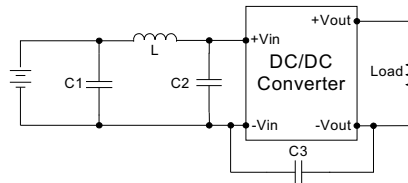

| | C1 | L | C2 | C3 |
|-------------|-----------------------------------|------|------------------|-----------------|
| VA-3R3XXXXX | 1210, 2.2uF/100V | 18uH | | |
| VA-05XXXXXX | 1210, 2.2uF/100V | 18uH | | |
| VA-12XXXXXX | 1210, 2.2uF/100V | 18uH | | |
| VA-15XXXXXX | 1210, 2.2uF/100V | 18uH | | |
| VA-24XXXXXX | 1210, 2.2uF/100V | 18uH | 1210, 2.2uF/100V | 1206, 470pF/2KV |
| VA-48XXXXXX | Electrolytic capacitor, 10uF/100V | 18uH | 1210, 2.2uF/100V | 1206, 470pF/2KV |

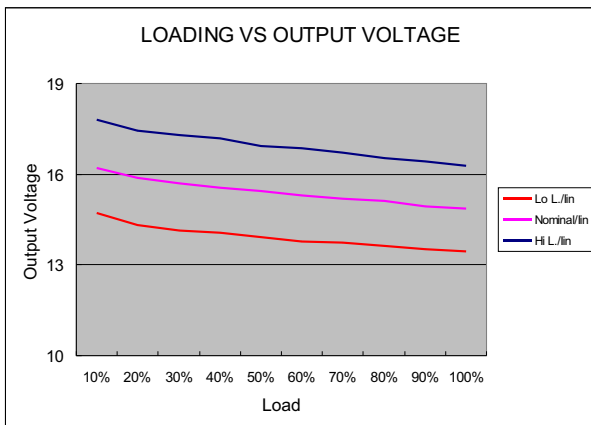



5 Models

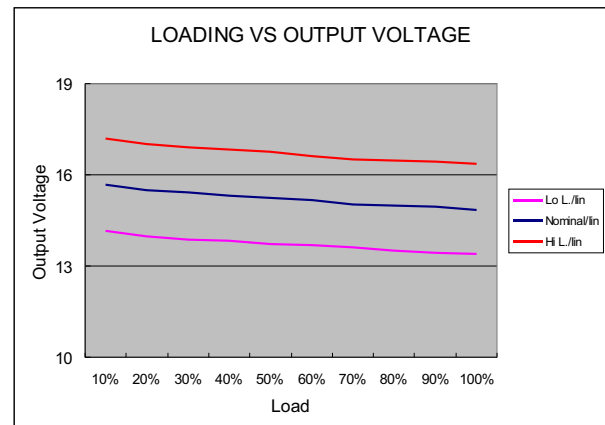

12 Models

The models listed above is just for standard type. If you need the special specification product, please contact our service member by telephone presented in shortform cover or e-mail to : sales@motien.com.tw

MECHANICAL SPECIFICATIONS

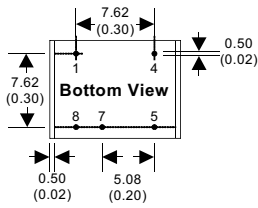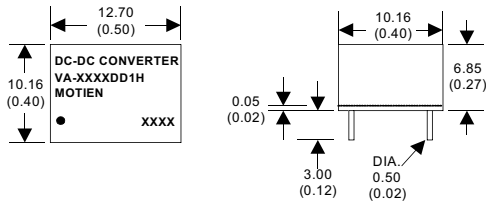

8 Pin DIL Package

- Notes : All dimensions are typical in millimeters (inches).
1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)

| PIN CONNECTIONS | |
|-----------------|-----------|
| PIN NUMBER | Dual |
| 1 | -V Input |
| 4 | +V Input |
| 5 | +V Output |
| 7 | Common |
| 8 | -V Output |

(The Pin Connection of high isolation one is the same with normal one.)