

RD-1.5W Series

1.5W 2:1 Regulated Single & Dual output

Features

- Wide 2:1 Input Range
- Full SMD Technology
- 1500 VDC Isolation, Up to 3500 VDC
- Continuous Short Circuit Protection
- Efficiency up to 75%
- -40 ~ 85°C Operating Temperature
- Plastic Case Standard, Optional Metal Case



The RD series is a family of cost effective 1.5W single & dual output DC-DC converters. These converters combine Plastic case in a 24-pin DIL package with high performance features such as 1500 VDC ~ 3500VDC input/output isolation voltage, continuous short circuit protection with automatic restart and high line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 5, 12, 24 and 48 with output voltage of 5, 7.2, 9, 12, 15, 18, 24, ± 5 , ± 7.2 , ± 9 , ± 12 , ± 15 , ± 18 and ± 24 Vdc. High performance features include high efficiency operation up to 75% and output voltage accuracy of $\pm 1\%$ maximum.

All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS	
Voltage accuracy	$\pm 1\%$
Line regulation	$\pm 0.5\%$
Load regulation	$\pm 0.5\%$
Ripple & noise(20 MHz bandwidth)(1)	60mV pk-pk
Short circuit protection	Continuous
Temperature coefficient	$\pm 0.02\%/^{\circ}\text{C}$
Capacitor load(2)	See table

INPUT SPECIFICATIONS	
Voltage Range	See table
Max. Input Current	See table
No-Load Input Current	See table
Input Filter	PI Type
Input Reflected Ripple Current(3)	35mA pk-pk

GENERAL SPECIFICATIONS	
Efficiency	See table, typ.
I/O Isolation Voltage(3 sec)	
Input/Output	1500~3500Vdc
Metal Case/Input & Output	1000Vdc
I/O Isolation Capacitance	60 pF Typ.
I/O Isolation Resistance	1000M Ohm
Switching Frequency	100~400kHz
Humidity	95% rel H
Reliability Calculated MTBF(MIL-HDBK-217 F)	>1Mhrs
Safety Standard : (designed to meet)	IEC 60950-1



PHYSICAL SPECIFICATIONS	
Case Material	Non-conductive Black Plastic(UL94V-0 rated) Nickel-coated Copper
Base Material	Non-conductive Black Plastic(UL94V-0 rated)
Pin Material	$\varnothing 0.5\text{mm}$ Brass Solder-coated
Potting Material	Epoxy (UL94V-0 rated)
Weight	12.5g(Plastic Case)/15.0g(Metal Case)
Dimensions	1.25"x0.8"x0.4"

ENVIRONMENT SPECIFICATIONS	
Operating Temperature	-40°C~85°C(See Derating Curve)
Maximum Case Temperature	100°C
Storage Temperature	-40°C~125°C
Cooling	Nature Convection

ABSOLUTE MAXIMUM RATINGS(4)	
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Input Surge Voltage(100mS)	
5 Models	15 Vdc ,max.
12 Models	24 Vdc ,max.
24 Models	40 Vdc ,max.
48 Models	80 Vdc ,max.
Soldering Temperature (1.5mm from case 10sec. max.)	260°C ,max.

RD - 1.5W 2:1 Regulated Single & Dual output

PART NUMBER STRUCTURE

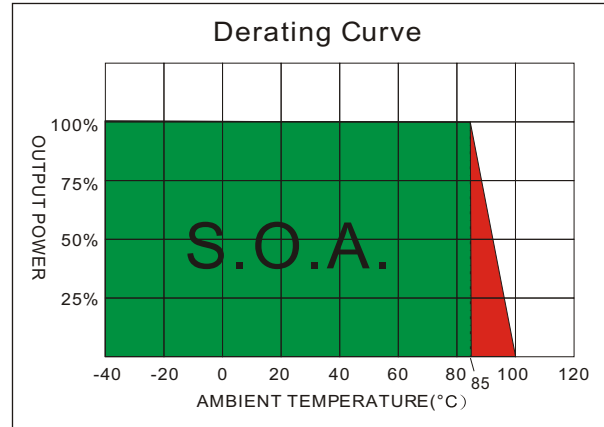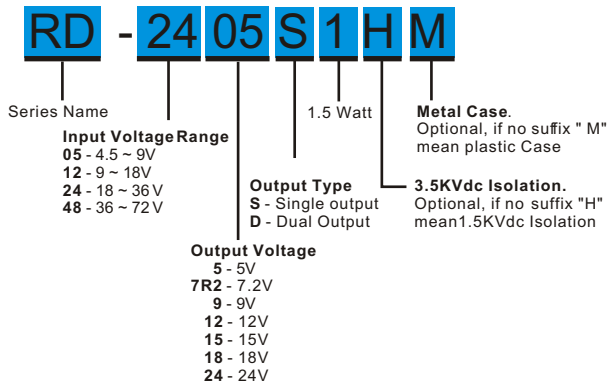

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL (%)	Capacitor Load (uF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
RD-0505S1	4.5-9	40	429	5	75	300	70	2200
RD-057R2S1	4.5-9	40	423	7.2	52	208	70	1000
RD-0509S1	4.5-9	40	423	9	42	167	71	470
RD-0512S1	4.5-9	40	417	12	125	125	72	470
RD-0515S1	4.5-9	40	417	15	31	100	72	470
RD-0518S1	4.5-9	40	417	18	21	83	72	220
RD-0524S1	4.5-9	40	429	24	16	63	72	220
RD-0505D1	4.5-9	40	423	±5	±38	±150	65	±1000
RD-057R2D1	4.5-9	40	423	±7.2	±26	±104	65	±220
RD-0509D1	4.5-9	40	417	±9	±21	±83	67	±220
RD-0512D1	4.5-9	40	417	±12	±16	±63	70	±220
RD-0515D1	4.5-9	40	417	±15	±13	±50	67	±220
RD-0518D1	4.5-9	40	423	±18	±10	±42	66	±220
RD-0524D1	4.5-9	40	423	±24	±8	±31	66	±100
RD-1205S1	9-18	20	176	5	75	300	71	2200
RD-127R2S1	9-18	40	176	7.2	52	208	71	1000
RD-1209S1	9-18	20	171	9	42	167	73	470
RD-1212S1	9-18	20	171	12	125	125	73	470
RD-1215S1	9-18	20	169	15	31	100	74	470
RD-1218S1	9-18	40	174	18	21	83	72	220
RD-1224S1	9-18	20	176	24	16	63	71	220
RD-1205D1	9-18	20	176	±5	±38	±150	71	±1000
RD-127R2D1	9-18	40	176	±7.2	±26	±104	71	±220
RD-1209D1	9-18	20	171	±9	±21	±83	73	±220
RD-1212D1	9-18	20	169	±12	±16	±63	74	±220
RD-1215D1	9-18	20	171	±15	±13	±50	73	±220
RD-1218D1	9-18	40	171	±18	±10	±42	73	±220
RD-1224D1	9-18	20	174	±24	±8	±31	72	±100
RD-2405S1	18-36	12	87	5	75	300	72	2200
RD-247R2S1	18-36	12	87	7.2	52	208	72	1000

Suffix "H" means 3.5KVdc isolation

Suffix "M" means Metal Case instead of standard Plastic case

RD - 1.5W 2:1 Regulated Single & Dual output

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL (%)	Capacitor Load(μF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
RD-24 09S1	18-36	12	84	9	42	167	74	470
RD-24 12S1	18-36	12	83	12	125	125	75	470
RD-24 15S1	18-36	12	83	15	31	100	75	470
RD-24 18S1	18-36	12	83	18	21	83	75	220
RD-24 24S1	18-36	12	86	24	16	63	73	220
RD-2405 D1	18-36	12	87	±5	±38	±150	72	±1000
RD-247R 2D1	18-36	12	87	±7.2	±26	±104	72	±220
RD-2409 D1	18-36	12	84	±9	±21	±83	74	±220
RD-2412 D1	18-36	12	84	±12	±16	±63	74	±220
RD-2415 D1	18-36	12	84	±15	±13	±50	74	±220
RD-2418 D1	18-36	12	86	±18	±10	±42	73	±220
RD-2424 D1	18-36	12	87	±24	±8	±31	72	±100
RD-48 05S1	36-72	8	45	5	75	300	70	2200
RD-487R2S1	36-72	8	43	7.2	52	208	72	1000
RD-48 09S1	36-72	8	43	9	42	167	73	470
RD-48 12S1	36-72	8	42	12	125	125	74	470
RD-48 15S1	36-72	8	42	15	31	100	74	470
RD-48 18S1	36-72	8	43	18	21	83	73	220
RD-48 24S1	36-72	8	44	24	16	63	71	220
RD-4805 D1	36-72	8	43	±5	±38	±150	72	±1000
RD-487R 2D1	36-72	8	43	±7.2	±26	±104	72	±220
RD-4809 D1	36-72	8	43	±9	±21	±83	73	±220
RD-4812 D1	36-72	8	43	±12	±16	±63	73	±220
RD-4815 D1	36-72	8	43	±15	±13	±50	73	±220
RD-4818 D1	36-72	8	43	±18	±10	±42	72	±220
RD-4824 D1	36-72	8	44	±24	±8	±31	71	±100


Suffix "H" means 3.5KVdc isolation

Suffix "M" means Metal Case instead of standard Plastic case

NOTE

1. Typical value at nominal input voltage and full load.
2. Test by nominal input voltage and constant resistor load.
3. Measured Input reflected ripple current with a simulated source inductance of 12μH.
4. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
5. Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.
6. It's necessary to add minimum capacitor in output for some models, please check single model datasheet for detail value.

MECHANICAL SPECIFICATIONS FOR HIGH ISOLATION MODEL

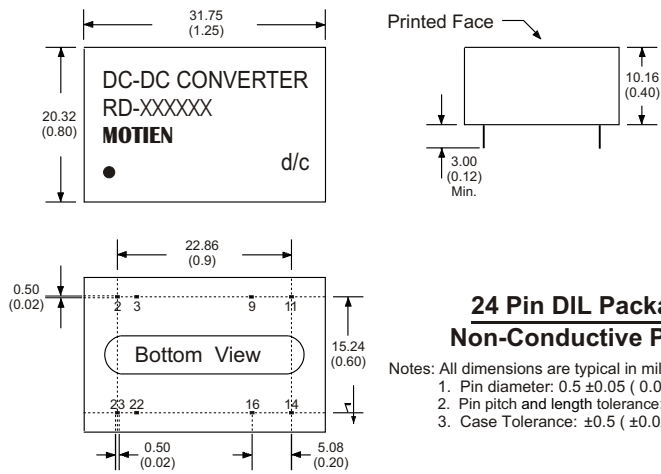


**24 Pin DIL Package
Non-Conductive Plastic**

Notes: All dimensions are typical in millimeters (inches).
 1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input

(The Pin Connection of high isolation one is the same with normal one.)

MECHANICAL SPECIFICATIONS

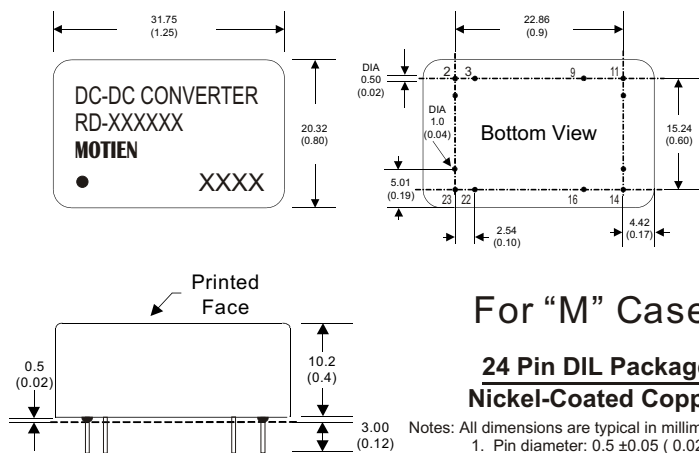

For "M" Case

**24 Pin DIL Package
Nickel-Coated Copper**

Notes: All dimensions are typical in millimeters (inches).
 1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)
 4. Stand-off tolerance: ± 0.1 (± 0.004)

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input

(The Pin Connection of high isolation one is the same with normal one.)