

FEATURES

- ▶ Fully encapsulated Plastic Case
- ▶ 3 Mounting Versions:
 - PCB Mounting with Solder Pins
 - Chassis Mounting with Screw Terminals
 - DIN-Rail Mounting
- ▶ Universal Input 85-264 VAC, 47- 440 Hz
- ▶ Protection Class II
- ▶ Safety Approval to cUL/UL/IEC/EN 60950-1
- ▶ UL508 Approval (Option)
- ▶ Over Load and Over Voltage Protection
- ▶ 3 Year Product Warranty



PRODUCT OVERVIEW

The MINMAX AZF-60 series is a new range of fully encapsulated AC/DC power supply modules. The product features EMI-filter to EN55022, class B and EMS compliance to EN 61000-4 standard. Universal input voltage 85-264VAC and International safety approvals qualifies these power modules for applications in products with worldwide markets. For industrial applications, the models for chassis mounting can also be supplied as option with UL508 approval. The AZF-60 series provide a cost effective solution for many space critical applications in commercial and industrial electronic equipment.

Model Selection Guide

| Model Number PCB Mounting (For model with Chassis Mounting, add suffix C) | Output Voltage VDC | Output Current Max. mA | Input Current 115VAC, 60Hz | | Max. capacitive Load μF | Efficiency (typ.) @Max. Load % |
|--|-----------------------|------------------------------|-------------------------------|---------------------------|----------------------------|--------------------------------------|
| | | | @Max. Load mA(typ.) | @No Load mA(typ.) | | |
| | | | UL ^{us} UL508 | UL ^{us} UL508 | | |
| AZF-60S051 | 5.1 | 10,000 | 936 | 50 | 8000 | 79 |
| AZF-60S12 | 12 | 5000 | 1060 | 50 | 3900 | 82 |
| AZF-60S15 | 15 | 4000 | 1047 | 50 | 3300 | 83 |
| AZF-60S24 | 24 | 2500 | 1035 | 50 | 1500 | 84 |
| AZF-60S36 | 36 | 1666 | 1035 | 50 | 1000 | 84 |
| AZF-60S48 | 48 | 1250 | 1035 | 50 | 680 | 84 |

Input Specifications

| Parameter | Model | Min. | Typ. | Max. | Unit |
|-------------------------------------|------------|------|------|------|------|
| Input Voltage Range | All Models | 85 | --- | 264 | VAC |
| Input Frequency Range | | 47 | --- | 63 | Hz |
| Input Voltage Range | | 120 | --- | 370 | VDC |
| Inrush Current (Cold Start at 25°C) | 115VAC | --- | --- | 30 | A |
| | 230VAC | --- | --- | 50 | A |

Output Specifications

| Parameter | Conditions | Min. | Typ. | Max. | Unit | |
|------------------------------|--|----------------------|-------|------|---------|------------------------|
| Output Voltage Accuracy | | --- | ±1.0 | ±2.0 | % | |
| Line Regulation | Vin=Min. to Max. | --- | ±0.2 | ±1.0 | % | |
| Load Regulation | Iout=Min. to Max. | --- | ±0.5 | ±1.0 | % | |
| Ripple & Noise | 0-20 MHz Bandwidth | 5.1VDC Output Models | --- | 2.0 | 3.0 | %V _{PP} of Vo |
| | | Other Output Models | --- | 1.0 | 1.3 | %V _{PP} of Vo |
| Minimum Load | | --- | 10 | --- | %Inom. | |
| Over Voltage Protection | Zener diode clamp | --- | 120 | --- | % of Vo | |
| Transient Response Deviation | (Iout=100% to Iout=50%) | | ±3 | ±6 | % | |
| Temperature Coefficient | | --- | ±0.02 | --- | %/°C | |
| Overshoot | | --- | --- | 5 | % Vout | |
| Current Limitation | Foldback, auto-recovery (long term overload condition may cause damage) | 105 | --- | --- | %Inom. | |
| Short Circuit Protection | Hiccup mode, indefinite (automatic recovery) | | | | | |

General Specifications

| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------------|-----------------------------------|--|------|------|----------------------|
| I/O Isolation Voltage | Input to Output, 60 Seconds | 3000 | --- | --- | VACrms |
| I/O Isolation Resistance | 500 VDC | 100 | --- | --- | MΩ |
| Switching Frequency | | --- | 100 | --- | KHz |
| Hold-up Time | | --- | 20 | --- | ms |
| MTBF (calculated) | MIL-HDBK-217F@25°C, Ground Benign | 125,000 | | | Hours |
| EMC Emission | Conducted and radiated | EN 55011 class B, EN 55022 class B, FCC part 15 class B | | | |
| EMC Immunity according EN61000-6-1 | Standard | Specification Requirement | | | Performance Criteria |
| | EN61000-4-2 | Air ±8KV Cont. ±4KV | | | B |
| | EN61000-4-3 | 80~1000MHz, 10V/m 80% AM, 1KHz modulation | | | A |
| | EN61000-4-4 | AC port ±2KV DC, SL, TL ±2KV not less than 1 min. | | | B |
| | EN61000-4-5 | 1.2/50µS(8/20µS) AC dif. ±1KV DC ±0.5KV | | | B |
| | EN61000-4-6 | 0.15~80MHz, 10Vrms (functional earth ports included) 80% AM, 1KHz modulation | | | B |
| | EN61000-4-8 | 50Hz/60Hz, 30A/m | | | A |
| | EN61000-4-11 | 30%, 10ms 60%, 100ms, 95%, 5000ms | | | B C |
| Protection Class II | | According IEC/EN 60536 | | | |
| Safety Approvals | | cUL/UL 60950-1, IEC/EN 60950-1 (UL508 for models with order code suffix ICE only) | | | |


Environmental Specifications

| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------|--------------------------------------|-------|------|-------------|------|
| Temperature Range (operational) | Ambient | -10°C | | +70°C | |
| Power Derating | +50°C to +70°C | | | 2.25W / °C | |
| Power Derating (5.1Vout) | +40°C to +70°C | | | 2.25W / °C | |
| Storage Temperature Range | | -40°C | | +85°C | |
| Over Temperature Protection | at 90°C (automatic recovery at 67°C) | | | | |
| Cooling | Free-Air convection | | | | |
| Humidity (non condensing) | | --- | | 95 % rel. H | |

Notes

- All specifications typical at Ta=+25°C, resistive load, 115VAC, 60Hz input voltage and after warm-up time rated output current unless otherwise noted.
- These power modules require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage the power supplies however they may not meet all listed specifications.
- Other input and output voltage may be available, please contact factory.
- Long term short circuit operation may cause damage to the unit.
- To order the module with chassis mount package, please add a **suffix C** (e.g. AZF-60S12C).
- To order the module with UL508 safety, please add a **suffix ICE** (e.g. AZF-60S12ICE).
- Part number for DIN-Rail mounting bracket: **AC-DIN-02**
- That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- Specifications are subject to change without notice

Package Specifications PCB Mounting

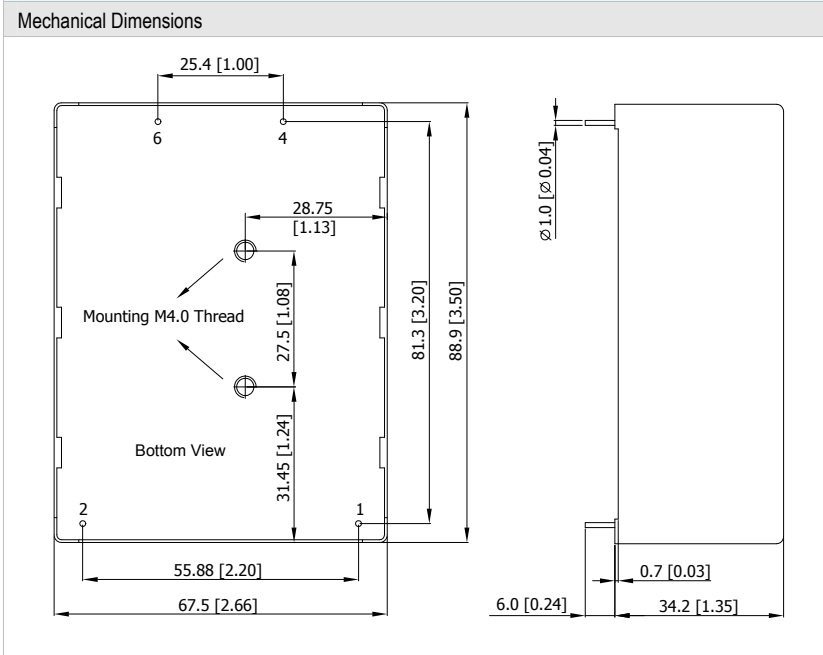

Pin Connections


| Pin | Function |
|-----|--------------------|
| 1 | AC(N) – AC Neutral |
| 2 | AC(L) – AC Line |
| 4 | +Vout |
| 6 | -Vout |

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: ± 1.0 (± 0.04)
- ▶ Pin diameter $\varnothing 1.0 \pm 0.1$ (0.04 ± 0.004)

Physical Characteristics

| | |
|---------------|---|
| Case Size | : 88.9x67.5x34.2mm (3.50x2.66x1.35 inches) |
| Case Material | : Plastic resin + Fiberglass (flammability to UL 94V-0 rated) |
| Pin Material | : Copper Alloy with Gold Plate Over Nickel Subplate |
| Weight | : 345g |

Package Specifications Chassis Mounting (order code suffix C)

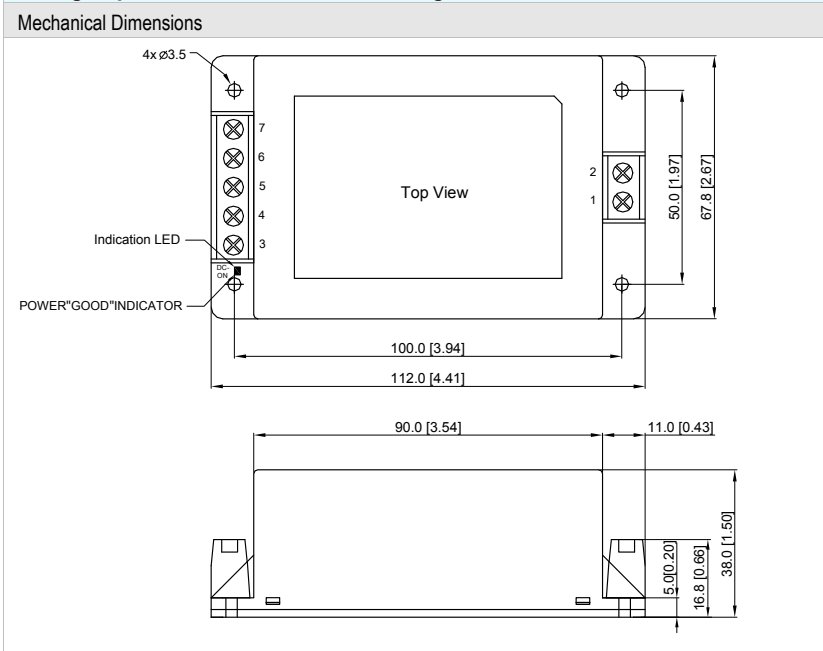

Connections

| Terminal | Function |
|----------|--------------------|
| 1 | AC(N) – AC Neutral |
| 2 | AC(L) – AC Line |
| 3 | NC |
| 4 | +Vout |
| 5 | NC |
| 6 | -Vout |
| 7 | NC |

NC: No Connection


- ▶ All dimensions in mm (inches)
- ▶ Tolerance: ± 1.0 (± 0.04)

Physical Characteristics

| | |
|---------------|---|
| Case Size | : 112.0x67.8x38.0mm (4.41x2.67x1.50 inches) |
| Case Material | : Plastic resin + Fiberglass (flammability to UL 94V-0 rated) |
| Weight | : 357g |

Package Specifications with DIN Rail Mounting Bracket

Mechanical Dimensions

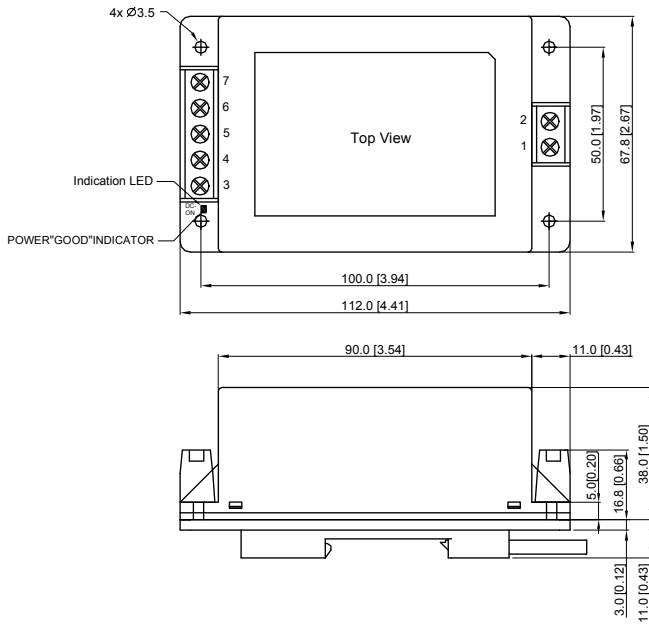

Physical Characteristics

| | |
|---------------|---|
| Case Size | : 112.0x67.8x38.0mm (4.41x2.67x1.50 inches) |
| Case Material | : Plastic resin + Fiberglass (flammability to UL 94V-0 rated) |
| Weight | : 410g |

DIN-Rail Mounting Bracket (Order Code for Kit : AC-DIN-02)

