

VJ-2W Series



2W 4:1 Regulated Single & Dual output

Features

- Wide 4:1 Input Range
- Full SMD Technology
- 1500 VDC Isolation, Up to 3500 VDC
- Continuous Short Circuit Protection
- Efficiency up to 78%
- -40 ~ 85°C Operation Temperature Range
- Metal Case Standard, Optional Plastic Case



The VJ series is a family of cost effective 2W single & dual output DC-DC converters. These converters are consisted with Nickel-coated copper in a 24-pin DIL package with high performance features such as 1500 VDC ~ 3500VDC input/output isolation voltage, continuous short circuit protection with automatic restart and tight line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 24 and 48 with output voltage of 3.3, 5, 9, 12, 15, 24, ± 3.3 , ± 5 , ± 9 , ± 12 , ± 15 and ± 24 Vdc. High performance features include high efficiency operation up to 78% and output voltage accuracy of $\pm 1\%$ maximum.

All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified

| OUTPUT SPECIFICATIONS | |
|--------------------------------------|---|
| Voltage accuracy | $\pm 1\%$ |
| Line regulation | $\pm 0.5\%$ |
| Load regulation | $\pm 0.5\%$ |
| | (Output 3.3V / ± 3.3 V Model) $\pm 1.5\%$ |
| Ripple & noise (20 MHz bandwidth)(1) | 60mV pk-pk |
| Short circuit protection | Indefinite (Automatic Recovery) |
| Temperature coefficient | $\pm 0.02\%/^{\circ}\text{C}$ |
| Capacitor load(2) | See table |

| INPUT SPECIFICATIONS | |
|-----------------------------------|------------|
| Voltage Range | See table |
| Max. Input Current | See table |
| No-Load Input Current | See table |
| Input Filter | PI Type |
| Input Reflected Ripple Current(3) | 35mA pk-pk |

| GENERAL SPECIFICATIONS | |
|---|----------------|
| Efficiency | See table, typ |
| I/O Isolation Voltage(3 sec) | |
| Input/Output | 1500~3500Vdc |
| Metal Case/Input & Output | 1000Vdc |
| I/O Isolation Capacitance | 470 pF Typ. |
| I/O Isolation Resistance | 1000M Ohm |
| Switching Frequency | Typical 266kHz |
| Humidity | 95% rel H |
| Reliability Calculated MTBF(MIL-HDBK-217 F) | >1.121 Mhrs |
| Safety Standard : (designed to meet) | IEC 60950-1 |

| PHYSICAL SPECIFICATIONS | |
|-------------------------|---|
| Case Material | Nickel-coated Copper |
| | Non-conductive Black Plastic(UL94V-0 rated) |
| Base Material | Non-conductive Black Plastic(UL94V-0 rated) |
| Pin Material | $\varnothing 0.5$ mm Brass Solder-coated |
| Potting Material | Epoxy (UL94V-0 rated) |
| Weight | 17.0g(Metal Case)/13.5g(Plastic Case) |
| Dimensions | 1.25"x0.8"x0.4" |



| ENVIRONMENT SPECIFICATIONS | |
|----------------------------|--------------------------------|
| Operating Temperature | -40°C~85°C(See Derating Curve) |
| Maximum Case Temperature | 100°C |
| Storage Temperature | -40°C~125°C |
| Cooling | Nature Convection |

| ABSOLUTE MAXIMUM RATINGS(4) | |
|--|-------------|
| These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability. | |
| Input Surge Voltage(100mS) | |
| 24 Models | 40 Vdc max. |
| 48 Models | 80 Vdc max. |
| Soldering Temperature | 260°C max. |
| (1.5mm from case 10sec. max.) | |

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, MOTIEN Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

VJ - 2W 4:1 Regulated Single & Dual output

PART NUMBER STRUCTURE

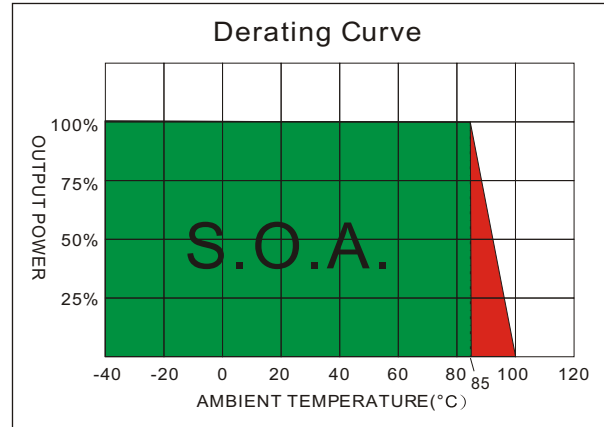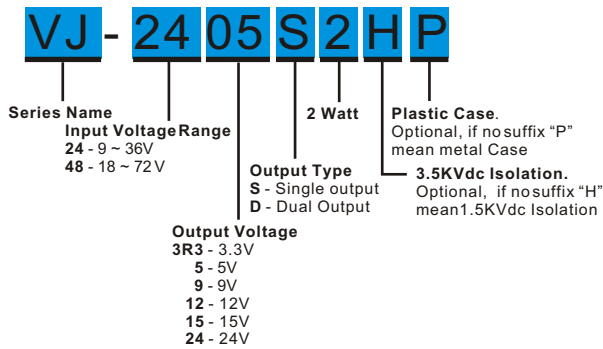

MODEL SELECTION GUIDE

| MODEL NUMBER | INPUT Voltage Range (Vdc) | INPUT Current | | OUTPUT Voltage (Vdc) | OUTPUT Current | | EFFICIENCY @FL(%) | Capacitor Load(uF) |
|--------------|---------------------------|---------------|----------------|----------------------|----------------|----------------|-------------------|--------------------|
| | | No-Load (mA) | Full Load (mA) | | Min. load (mA) | Full load (mA) | | |
| VJ-243R3S2 | 9-36 | 15 | 110 | 3.3 | 0 | 600 | 75 | 470 |
| VJ-2405S2 | 9-36 | 15 | 109.6 | 5 | 0 | 400 | 76 | 330 |
| VJ-2409S2 | 9-36 | 15 | 106.8 | 9 | 0 | 222 | 78 | 68 |
| VJ-2412S2 | 9-36 | 15 | 106.8 | 12 | 0 | 166 | 78 | 47 |
| VJ-2415S2 | 9-36 | 15 | 106.8 | 15 | 0 | 133 | 78 | 22 |
| VJ-2424S2 | 9-36 | 15 | 106.8 | 24 | 0 | 83 | 78 | 10 |
| VJ-243R3D2 | 9-36 | 15 | 110 | ±3.3 | 0 | ±303 | 75 | ±220 |
| VJ-2405D2 | 9-36 | 15 | 109.6 | ±5 | 0 | ±200 | 76 | ±100 |
| VJ-2409D2 | 9-36 | 15 | 106.8 | ±9 | 0 | ±111 | 78 | ±33 |
| VJ-2412D2 | 9-36 | 15 | 106.8 | ±12 | 0 | ±83 | 78 | ±22 |
| VJ-2415D2 | 9-36 | 15 | 106.8 | ±15 | 0 | ±66 | 78 | ±10 |
| VJ-2424D2 | 9-36 | 15 | 106.8 | ±24 | 0 | ±41 | 78 | ±10 |
| VJ-483R3S2 | 18-72 | 12 | 55 | 3.3 | 0 | 600 | 75 | 470 |
| VJ-4805S2 | 18-72 | 12 | 54.82 | 5 | 0 | 400 | 76 | 330 |
| VJ-4809S2 | 18-72 | 12 | 53.4 | 9 | 0 | 222 | 78 | 68 |
| VJ-4812S2 | 18-72 | 12 | 53.4 | 12 | 0 | 166 | 78 | 47 |
| VJ-4815S2 | 18-72 | 12 | 53.4 | 15 | 0 | 133 | 78 | 22 |
| VJ-4824S2 | 18-72 | 12 | 53.4 | 24 | 0 | 83 | 78 | 10 |
| VJ-483R3D2 | 18-72 | 12 | 55.5 | ±3.3 | 0 | ±303 | 75 | ±220 |
| VJ-4805D2 | 18-72 | 12 | 54.82 | ±5 | 0 | ±200 | 76 | ±100 |
| VJ-4809D2 | 18-72 | 12 | 53.4 | ±9 | 0 | ±111 | 78 | ±33 |
| VJ-4812D2 | 18-72 | 12 | 53.4 | ±12 | 0 | ±83 | 78 | ±22 |
| VJ-4815D2 | 18-72 | 12 | 53.4 | ±15 | 0 | ±66 | 78 | ±10 |
| VJ-4824D2 | 18-72 | 12 | 53.4 | ±24 | 0 | ±41 | 78 | ±10 |

Suffix "H" means 3.5KVdc isolation
 Suffix "P" means Plastic case instead of standard Metal Case


NOTE

1. Ripple/Noise measured with a 1uF ceramic capacitor.
2. Test by nominal input voltage and constant resistor load.
3. Measured Input reflected ripple current with a simulated source inductance of 12uH.
4. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.

TEST CONFIGURATIONS


Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor L_{in} (12uH) and a source capacitor C_{in} (47uF, ESR<1.0Ω at 100KHz) at nominal input and full load.

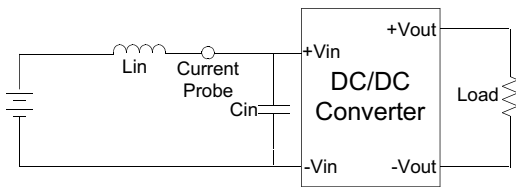


Output Ripple & Noise Measurement Test


Use a capacitor C_{out} (1.0uF) measurement. The Scope measurement bandwidth is 0-20MHz.

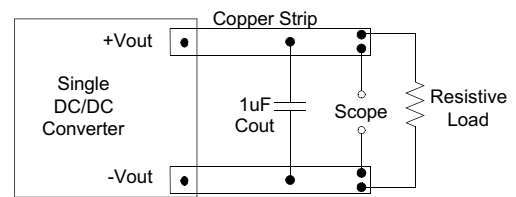

ELECTRICAL CHARACTERISTIC CURVES

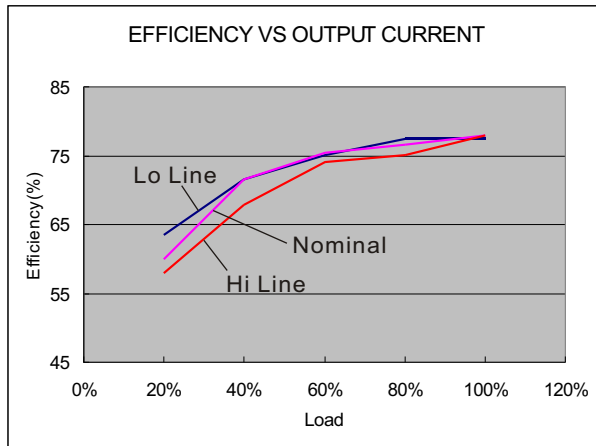


24 Models

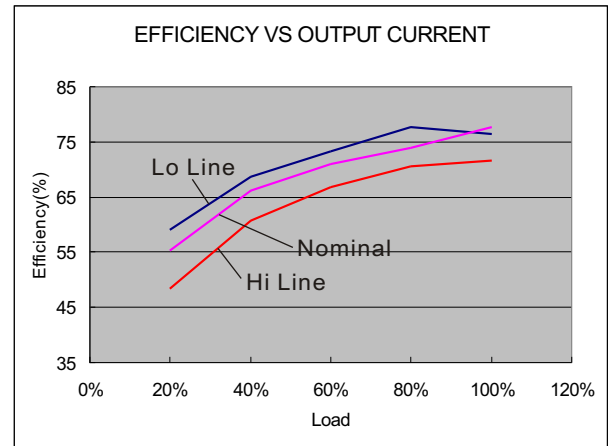

48 Models

MECHANICAL SPECIFICATIONS

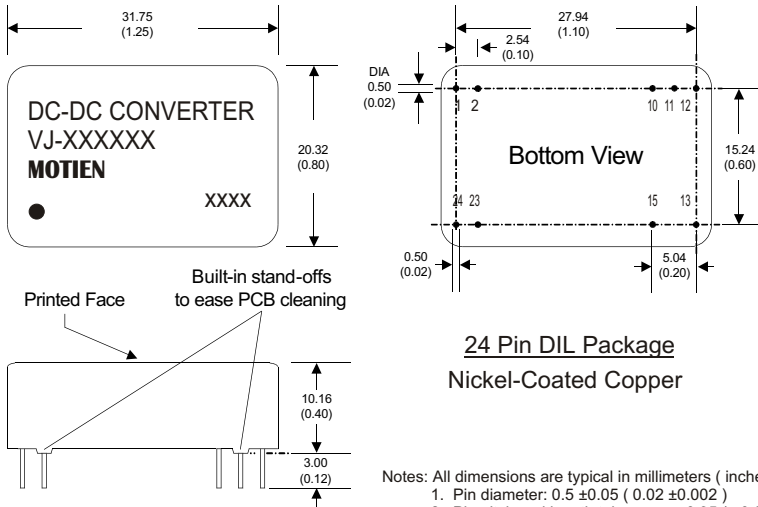


Notes: All dimensions are typical in millimeters (inches).
 1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)

| PIN CONNECTIONS | | |
|-----------------|-----------|-----------|
| PIN NUMBER | SINGLE | DUAL |
| 1 | +V Input | +V Input |
| 2 | +V Input | +V Input |
| 10 | N.C. | Common |
| 11 | N.C. | Common |
| 12 | -V Output | N.C. |
| 13 | +V Output | -V Output |
| 15 | N.C. | +V Output |
| 23 | -V Input | -V Input |
| 24 | -V Input | -V Input |

(The Pin Connection of high isolation one is the same with normal one.)

MECHANICAL SPECIFICATIONS

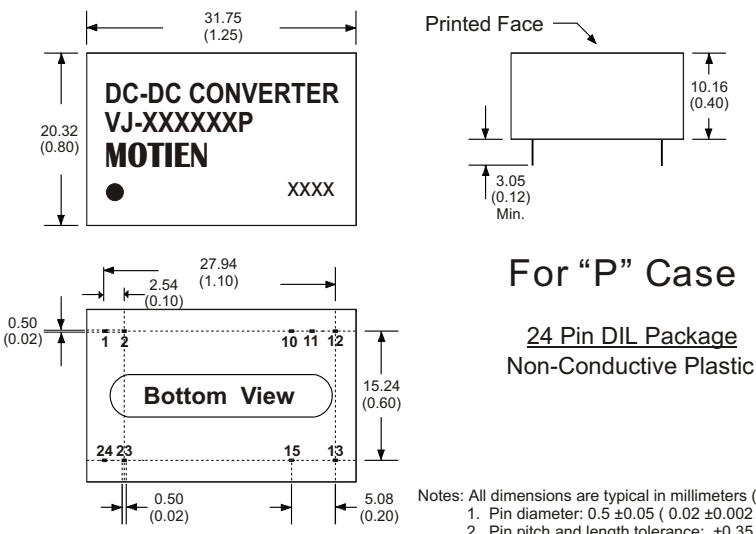

Notes: All dimensions are typical in millimeters (inches).
 1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)

| PIN CONNECTIONS | | |
|-----------------|-----------|-----------|
| PIN NUMBER | SINGLE | DUAL |
| 1 | +V Input | +V Input |
| 2 | +V Input | +V Input |
| 10 | N.C. | Common |
| 11 | N.C. | Common |
| 12 | -V Output | N.C. |
| 13 | +V Output | -V Output |
| 15 | N.C. | +V Output |
| 23 | -V Input | -V Input |
| 24 | -V Input | -V Input |

(The Pin Connection of high isolation one is the same with normal one.)