

- Compact SIP-8 package
- I/O-isolation voltage 1'600 VDC
- Fully regulated outputs
- Operating temp range -40°C to $+95^{\circ}\text{C}$
- Continuous short circuit protection
- Remote On/Off
- 3-year product warranty
- Designed to meet UL 62368-1



TEC 2 is a new series with the design purpose to improve the prevalent 2 Watt SIP-8 DC/DC converters in terms of cost, efficiency and performance. The latest technology and components enable an increase in efficiency by more than 20%. With the reduction of thermal loss, the operating temperature range can be expanded from -40°C to $+95^{\circ}\text{C}$. The converters are fully regulated over 0 - 100% load (no minimum load is required). The low input range is extended from 4.5 to 13.2 VDC while models are also available with the standard 2:1 input ranges (see TEC 2WI series for 4:1 input ranges). The functional isolation system is designed to meet EN 62368-1 with 1600 VDC test voltage.

Models						
Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I _{max}	Vnom	I _{max}	
TEC 2-0910	4.5 - 13.2 VDC (9 VDC nom.)	3.3 VDC	500 mA			78 %
TEC 2-0911		5 VDC	400 mA			81 %
TEC 2-0919		9 VDC	222 mA			84 %
TEC 2-0912		12 VDC	167 mA			84 %
TEC 2-0913		15 VDC	134 mA			84 %
TEC 2-0915		24 VDC	83 mA			85 %
TEC 2-0921		+5 VDC	200 mA	-5 VDC	200 mA	81 %
TEC 2-0922		+12 VDC	83 mA	-12 VDC	83 mA	85 %
TEC 2-0923		+15 VDC	67 mA	-15 VDC	67 mA	84 %
TEC 2-1210		9 - 18 VDC (12 VDC nom.)	3.3 VDC	500 mA		
TEC 2-1211	5 VDC		400 mA			82 %
TEC 2-1219	9 VDC		222 mA			84 %
TEC 2-1212	12 VDC		167 mA			85 %
TEC 2-1213	15 VDC		134 mA			85 %
TEC 2-1215	24 VDC		83 mA			85 %
TEC 2-1221	+5 VDC		200 mA	-5 VDC	200 mA	82 %
TEC 2-1222	+12 VDC		83 mA	-12 VDC	83 mA	85 %
TEC 2-1223	+15 VDC		67 mA	-15 VDC	67 mA	84 %
TEC 2-2410	18 - 36 VDC (24 VDC nom.)		3.3 VDC	500 mA		
TEC 2-2411		5 VDC	400 mA			83 %
TEC 2-2419		9 VDC	222 mA			85 %
TEC 2-2412		12 VDC	167 mA			86 %
TEC 2-2413		15 VDC	134 mA			85 %
TEC 2-2415		24 VDC	83 mA			85 %
TEC 2-2421		+5 VDC	200 mA	-5 VDC	200 mA	83 %
TEC 2-2422		+12 VDC	83 mA	-12 VDC	83 mA	85 %
TEC 2-2423		+15 VDC	67 mA	-15 VDC	67 mA	86 %
TEC 2-4810		36 - 75 VDC (48 VDC nom.)	3.3 VDC	500 mA		
TEC 2-4811	5 VDC		400 mA			80 %
TEC 2-4819	9 VDC		222 mA			82 %
TEC 2-4812	12 VDC		167 mA			84 %
TEC 2-4813	15 VDC		134 mA			85 %
TEC 2-4815	24 VDC		83 mA			85 %
TEC 2-4821	+5 VDC		200 mA	-5 VDC	200 mA	80 %
TEC 2-4822	+12 VDC		83 mA	-12 VDC	83 mA	85 %
TEC 2-4823	+15 VDC		67 mA	-15 VDC	67 mA	83 %

Input Specifications

Input Current	- At no load	9 Vin models: 45 mA typ. 12 Vin models: 25 mA typ. 24 Vin models: 10 mA typ. 48 Vin models: 8 mA typ.
Surge Voltage		9 Vin models: 15 VDC max. (1 s max.) 12 Vin models: 25 VDC max. (1 s max.) 24 Vin models: 50 VDC max. (1 s max.) 48 Vin models: 100 VDC max. (1 s max.)
Under Voltage Lockout		9 Vin models: 2 VDC min. / 3 VDC typ. / 4 VDC max. 12 Vin models: 6 VDC min. / 7 VDC typ. / 8 VDC max. 24 Vin models: 13 VDC min. / 15 VDC typ. / 17 VDC max. 48 Vin models: 29 VDC min. / 32 VDC typ. / 35 VDC max.
Recommended Input Fuse		9 Vin models: 1'000 mA (slow blow) 12 Vin models: 500 mA (slow blow) 24 Vin models: 315 mA (slow blow) 48 Vin models: 160 mA (slow blow) <small>(The need of an external fuse has to be assessed in the final application.)</small>
Input Filter		Internal Capacitor

Output Specifications

Voltage Set Accuracy		±1% max.
Regulation	- Input Variation (Vmin - Vmax)	single output models: 0.2% max. dual output models: 0.2% max.
	- Load Variation (0 - 100%)	single output models: 1% max. dual output models: 1% max. (Output 1) 1% max. (Output 2)
	- Cross Regulation (25% / 100% asym. load)	dual output models: 5% max.
Ripple and Noise	- 20 MHz Bandwidth	75 mVp-p typ.
Capacitive Load	- single output	3.3 Vout models: 3'300 µF max. 5 Vout models: 1'680 µF max. 9 Vout models: 1'000 µF max. 12 Vout models: 820 µF max. 15 Vout models: 680 µF max. 24 Vout models: 220 µF max.
	- dual output	5 / -5 Vout models: 1'000 / 1'000 µF max. 12 / -12 Vout models: 470 / 470 µF max. 15 / -15 Vout models: 330 / 330 µF max.
Minimum Load		Not required
Temperature Coefficient		±0.02 %/K max.
Start-up Time		10 ms typ. / 20 ms max.
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		140 - 240% of Iout max. 180% typ. of Iout max.
Transient Response	- Response Time	500 µs typ. (25% Load Step)

Safety Specifications

Safety Standards	- IT / Multimedia Equipment	Designed for EN 62368-1 (no certification)
------------------	-----------------------------	---

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

EMC Specifications

EMI Emissions	- Conducted Emissions	EN 55032 class A (with external filter) EN 55032 class B (with external filter)
	- Radiated Emissions	EN 55032 class A (with external filter) EN 55032 class B (with external filter)
		External filter proposal: www.tracopower.com/overview/tec2
EMS Immunity	- Electrostatic Discharge	Air: EN 61000-4-2, ± 8 kV, perf. criteria A Contact: EN 61000-4-2, ± 6 kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 10 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, ± 2 kV, perf. criteria A EN 61000-4-5, ± 1 kV, perf. criteria A
	- Conducted RF Disturbances	Ext. input component: KY 220 μ F / 100 V EN 61000-4-6, 10 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 100 A/m, perf. criteria A 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +95°C
	- Case Temperature	+105°C max.
	- Storage Temperature	-55°C to +125°C
Power Derating	- High Temperature	5.9 %/K above 88°C
		See application note: www.tracopower.com/overview/tec2
Cooling System		Natural convection (20 LFM)
Remote Control	- Current Controlled Remote	On: open circuit Off: 2 to 4 mA current (internal 1 k Ω resistor)
	- Off Idle Input Current	External circuit proposal: www.tracopower.com/info/current-remote.pdf 2.5 mA typ.
Switching Frequency		100 kHz min. (PFM)
Insulation System		Functional Insulation
Isolation Test Voltage	- Input to Output, 60 s	1'600 VDC
Isolation Resistance	- Input to Output, 500 VDC	1'000 M Ω min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	50 pF max.
Reliability	- Calculated MTBF	6'620'000 h (MIL-HDBK-217F, ground benign)
Washing Process		Allowed (hermetical product)
		See Cleaning Guideline: www.tracopower.com/info/cleaning.pdf
Environment	- Vibration	MIL-STD-810F
	- Mechanical Shock	MIL-STD-810F
	- Thermal Shock	MIL-STD-810F
Housing Material		Non-conductive Plastic (UL 94 V-0 rated)
Potting Material		Silicone (UL 94 V-0 rated)
Pin Material		Copper
Pin Foundation Plating		Nickel (1 - 2 μ m)
Pin Surface Plating		Tin (3 - 5 μ m), matte
Housing Type		Plastic Case
Mounting Type		PCB Mount
Connection Type		THD (Through-Hole Device)
Footprint Type		SIP8
Soldering Profile		Wave Soldering
		260°C / 10 s max.
Weight		4.5 g

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Environmental Compliance - REACH Declaration

www.tracopower.com/info/reach-declaration.pdf

REACH SVHC list compliant

REACH Annex XVII compliant

- RoHS Declaration

www.tracopower.com/info/rohs-declaration.pdf

Exemptions: 7a, 7c-I



(RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).
The SCIP number is provided on request.)

Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tec2

Outline Dimensions

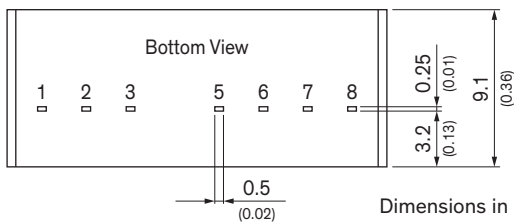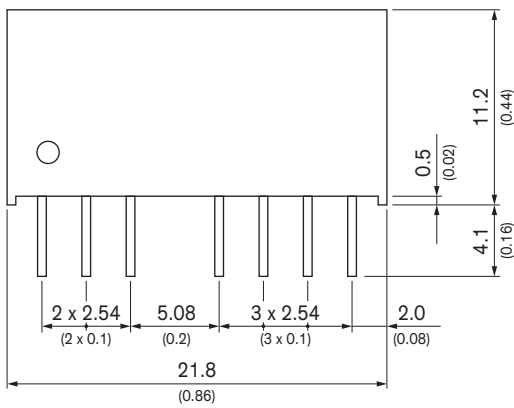

Dimensions in mm (inch)
Tolerances: ± 0.5 (± 0.02)
Pin pitch tolerances ± 0.25 (± 0.01)
Pin dimension tolerance ± 0.1 (0.004)

Pinout

Pin	Single	Dual
1	-Vin (GND)	-Vin (GND)
2	+Vin (Vcc)	+Vin (Vcc)
3	Remote On/Off	Remote On/Off
5	NC	NC
6	+Vout	+Vout
7	-Vout	Common
8	NC	-Vout

NC: Not connected