

late 08/16/2013

page 1 of 6

SERIES: PYB10-T & PYB10-U | DESCRIPTION: DC-DC CONVERTER

FEATURES

- up to 10 W isolated output
- industry standard pinout
- 4:1 input range (9~36 V, 18~75 V)
- smaller package
- single/dual regulated outputs
- 1,500 Vdc isolation
- continuous short circuit, over voltage protection
- reverse polarity protection on chassis mount (-T) option
- temperature range (-40~85°C)
- six-sided metal shielding
- efficiency up to 88%




MODEL		nput oltage	output voltage		ıtput rrent	output power	ripple and noise ¹	efficiency ²
	typ (Vdc)	range (Vdc)	(Vdc)	min (mA)	max (mA)	max (W)	max (mVp-p)	typ (%)
PYB10-Q24-S3	24	9~36	3.3	120	2400	8	80	79
PYB10-Q24-S5	24	9~36	5	100	2000	10	80	82
PYB10-Q24-S12	24	9~36	12	42	833	10	80	86
PYB10-Q24-S15	24	9~36	15	33	667	10	80	87
PYB10-Q24-S24	24	9~36	24	21	416	10	80	87
PYB10-Q24-D5	24	9~36	±5	±50	±1000	10	80	83
PYB10-Q24-D12	24	9~36	±12	±21	±416	10	80	86
PYB10-Q24-D15	24	9~36	±15	±16	±333	10	80	88
PYB10-Q48-S3	48	18~75	3.3	120	2400	8	80	79
PYB10-Q48-S5	48	18~75	5	100	2000	10	80	82
PYB10-Q48-S12	48	18~75	12	42	833	10	80	86
PYB10-Q48-S15	48	18~75	15	33	667	10	80	87
PYB10-Q48-S24	48	18~75	24	21	416	10	80	87
PYB10-Q48-D5	48	18~75	±5	±50	±1000	10	80	83
PYB10-Q48-D12	48	18~75	±12	±21	±416	10	80	86
PYB10-Q48-D15	48	18~75	±15	±16	±333	10	80	88

Notes:

- 1. Ripple and noise are measured at 20 MHz BW by "parallel cable" method
- 2. Efficiency is approximately 2% lower for Chassis Mount (-T) models.

PART NUMBER KEY

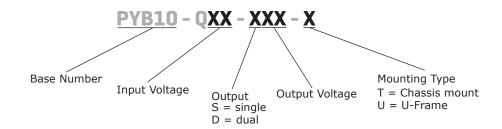

INPUT

parameter	conditions/description	min	typ	max	units
operating input voltage	24 V input models	9	24	36	Vdc
	48 V input models	18	48	75	Vdc
start up voltage	24 V input models			9	Vdc
start-up voltage	48 V input models			18	Vdc
	for maximum of 1 second				
surge voltage	24 V input models	-0.7		50	Vdc
	48 V input models	-0.7		100	Vdc
filter	pi filter				
	models ON (CTRL open or connect high l	evel, 3.5-12 Vdc)			
CTRL ¹	models OFF (CTRL connect GND or low level, 0-1.2 Vdc)				
	input current (models OFF)		1	3	mA

Note: 1. CTRL pin voltage is referenced to GND.

OUTPUT

parameter	conditions/description	min	typ	max	units
line regulation	full load, input voltage from low to high		±0.2	±0.5	%
load regulation	5% to 100% load		±0.5	±1	%
cross regulation	dual output models: main output 50% load, secondary output from 10% to 100% load			±5	%
voltage accuracy			±1	±2	%
voltage balance ²	dual output, balanced loads		±0.5	±1.5	%
switching frequency PWM mode			350		KHz
transient recovery time	25% load step change		300	500	μs
transient response deviation 25% load step change			±3	±5	%
temperature coefficient	100% load			±0.03	%/°C

Note: 2. For dual output models, unbalanced load can not exceed ±5%. If ±5% is exceeded, it may not meet all specifications.

PROTECTIONS

parameter	conditions/description	min	typ	max	units
short circuit protection	continuous, automatic recovery				
over voltage protection		110	120	140	%Vo

SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	for 1 minute at 1 mA max.	1,500			Vdc
solation resistance at 500 Vdc		1,000			МΩ
conducted emissions	nducted emissions CISPR22/EN55022, class A, class B (external circuit required, see Figure 1-b)				
radiated emissions	CISPR22/EN55022, class A, class B (extern	CISPR22/EN55022, class A, class B (external circuit required, see Figure 1-b)			
ESD	IEC/EN61000-4-2, class B, contact ± 4kV				
radiated immunity	IEC/EN61000-4-3, class A, 10V/m				
EFT/burst	IEC/EN61000-4-4, class B, ± 2kV (externa	IEC/EN61000-4-4, class B, \pm 2kV (external circuit required, see Figure 1-a)			
surge	IEC/EN61000-4-5, class B, ± 2kV (external circuit required, see Figure 1-a)				
conducted immunity	IEC/EN61000-4-6, class A, 3 Vr.m.s				
voltage dips & interruptions	IEC/EN61000-4-29, class B, 0%-70%				
MTBF as per MIL-HDBK-217F @ 25°C		1,000,000			hours
RoHS compliant	yes				

ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature	see derating curve	-40		85	°C
storage temperature		-55		125	°C
storage humidity non-condensing		5		95	%
case temperature	at full load, Ta=71°C			105	°C
vibration	10~55 Hz for 30 min. along X, Y and Z axis	is 10		G	

MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	chassis mount: 76.0 x 31.5 x 21.2 U-Frame: 52.32 x 54.99 x 19.05				mm mm
case material aluminum alloy					
weight	chassis mount U-Frame		44 58		g g

MECHANICAL DRAWING


CHASSIS MOUNT


units: mm[inch]

tolerance: $\pm 0.5[\pm 0.020]$

Wire range: 24~12 AWG

PIN CONNECTIONS			
PIN	Single Output	Dual Output	
1	CTRL	CTRL	
2	GND	GND	
3	Vin	Vin	
4	0V	-Vo	
5	NC	0V	
6	+Vo	+Vo	

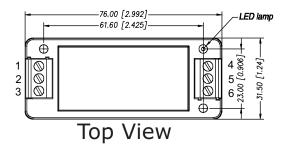

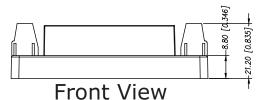

U-FRAME


units: mm[inch]


tolerance: $\pm 0.5[\pm 0.020]$


Wire range: 22~14 AWG DIN rail mounting kit available

(part# STK-DIN)

PIN CONNECTIONS			
PIN	Single Output	Dual Output	
1	GND	GND	
2	Vin	Vin	
3	CTRL	CTRL	
4	Case	Case	
5	NC	NC	
6	+Vo	+Vo	
7	NC	0V	
8	0V	-Vo	






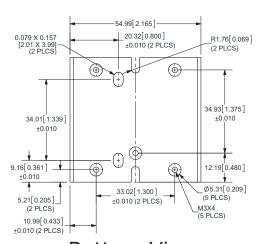

Bottom View

DERATING CURVES

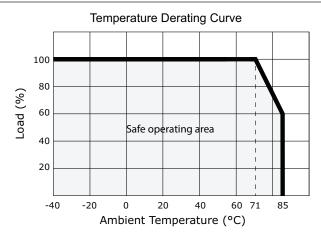

EMC RECOMMENDED CIRCUIT

CY2 **FUSE** Vin ⊙ Vin +Vo LDM1 LDM2 Figure 1 EUT LOAD CO -Vo GND \bigcirc GND (0V) (b) CY1 (a)

Table 1

Recommended external circuit components				
Vin (Vdc)	24	48		
FUSE	Choose according	to input current		
MOV	S14K35	S14K60		
LDM1	56µH	56μH		
TVS	SMCJ48A	SMCJ90A		
C0	330µF/50V	330µF/100V		
C1	1μF/50V	1µF/100V		
LDM2	4.7µH	4.7µH		
CY1	1 nF/2 KV	1 nF/2 KV		
CY2	1 nF/2 KV	1 nF/2 KV		

TEST CONFIGURATION

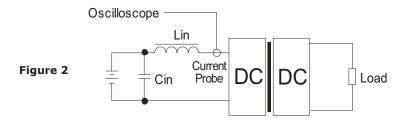


Table 2

External components		
Lin	4.7μH	
Cin	$220\mu\text{F, ESR} < 1.0\Omega$ at 100 KHz	


Note: Input reflected-ripple current is measured with an inductor Lin and Capacitor Cin to simulate source impedance.

APPLICATION NOTES

Recommended circuit

This series has been tested according to the following recommended testing circuit before leaving the factory. This series should be tested under load (see Figure 3). If you want to further decrease the input/output ripple, you can increase the capacitance accordingly or choose capacitors with low ESR (see table 3). However, the capacitance of the output filter capacitor must be appropriate. If the capacitance is too high, a startup problem might arise. For every channel of the output, to ensure safe and reliable operation, the maximum capacitance must be less than the maximum capacitive load (see Table 4).

Figure 3






Table 3

Vin (Vdc)	Cin (µF)	Cout (µF)
24	10~47	10
48	10~47	10

Table 4

Single Vout (Vdc)	Max. Capacitive Load (µF)	Dual Vout (Vdc)	Max. Capacitive Load ⁴ (µF)
3.3	2200		
5	2200	5	680
12	470¹	12	220³
15	330²	15	100
24	100		

Notes:

- 1. 330 μF for 48Vin. 2. 220 μF for 48Vin. 3. 150 μF for 48Vin.
- 4. For each output.

Note: 1. Minimum load shouldn't be less than 5%, otherwise ripple may increase dramatically. Operation under minimum load will not damage the converter, however, they may not meet all specifications listed.

2. Maximum capacitive load is tested at input voltage range and full load.

3. All specifications are measured at Ta=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.

REVISION HISTORY

rev.	description	date
1.0	initial release	06/26/2013
1.01	updated spec	08/16/2013

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters 20050 SW 112th Ave. Tualatin, OR 97062 **800.275.4899**

Fax 503.612.2383 **cui**.com techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.