


Series AMER90-CAZ up to 3.75A | AC-DC / DC-DC | LED Driver / Converter

FEATURES:

- Constant current LED Driver or Converter
- Input range 90-305VAC/47-440Hz
- High Efficiency up to 88%
- 115VAC Operating temperature -50 to 85°C
- 230VAC Operating temperature -55 to 85°C
- Dimmable via resistive
- 5 Years Limited Warranty



- Waterproof Case rated IP68
- Power Factor Correction
- Short Circuit Protection
- **Over Current Protection** ٠



Model	Output V		Output Voltage Dange	Input Voltage	Input Voltage	Mode of Operation	Efficiency (%)		
model	Power (W) ^①	Range (V) ^③	(A) ³	(VAC/Hz)	(VDC)		115 VAC	230 VAC	277 VAC
		00.50	4.0	00.005/47.440	100,100	Constant Current	87	86	86
AMER90-50180CAZ	90	36-50	1.8	90-305/47-440	130-430	Constant Voltage ^②	88	87	87
	00	04.00	<u>о г</u>	00 005/47 440	400,400	Constant Current	87	87	87
AMER90-36250CAZ	90	24-36	2.5	90-305/47-440	130-430	Constant Voltage ²	88	87	87
	00	40.04	0.75	00 005/47 440	130-430	Constant Current	86	86	86
AMER90-24375CAZ	90	12-24	3.75	90-305/47-440		Constant Voltage ⁽²⁾	87	86	86
Add suffix "-F"	No dimm	ing option							

 $^{(1)}$ Exceeding the maximum output power will permanently damage the converter.

⁽²⁾The dimming feature is not supported when units are used in Constant Voltage mode only, Aimtec suggests to order "-F" No dimming option in the case.

³In constant current mode output current is maximum shown, in constant voltage mode output voltage is the maximum shown. All

models can be ordered with optional North American colour input wires (black (L), white (N), green (GND)). Add "-NA" to part number when ordering.

NOTE: Aimtec limited warranty of 5 years is valid based on product operation at datasheet specifications at ambient temperature of 25°C, humidity<75%, nominal input voltage (115/230/277VAC) and at rated output load unless otherwise specified. See http://www.aimtec.com/terms-sale

AMER90-CAZ'S AC/DC LED drivers have electrical safeguards designed within to protect it from conventional electrical abnormalities with the levels listed in the safety table. Applications for use within rural agricultural, heavy industrial, and other areas or regions which are prone to 'dirty' electrical conditions which would subject any of the above models to excessive voltages surges or spikes, may damage or cause early life failure of product. In this case consideration should be made by the end user to ensure that adequate line or mains surge suppression is installed in front of Aimtec device to ensure the longevity of the products. Failure to identify excessive line surges violations prior to installation may damage sensitive equipment permanently.

Input Specifications

Parameters	Conditions	Typical	Maximum	Units
Current (full load)	115 VAC		1500	mA
	230 VAC		600	mA
	277 VAC		500	mA
	115 VAC		40	А
Inrush current <2ms(cold start)	230 VAC		50	А
	277 VAC		60	А
Leakage current	I/O		0.25	mA
	I/FG, O/FG		3.5	mA
Power factor	115 VAC	0.98		
	230 VAC	0.94		
	277 VAC	0.90		
External fuse	Recommended slow blow type	2.5		А
Start-up time		1000		ms

Output Specifications



Models Single output



Your Power Partner

up to 3.75A | AC-DC / DC-DC | LED Driver / Converter

	•••					
Parameters	Conditions	Typical	Maximum	Units		
Current accuracy		±3		%		
Line regulation	(LL-HL)	±2		%		
Load regulation	0-100% load	±3		%		
Ripple & Noise*		150		mV p-p		
Hold-up time		100		ms		
Current adjustment range ⁽⁵⁾		100-10		%		
© Displayers Alaise are responsed at 2004 to bendwidth by using a 0.4 vE (M/C) and (C/C) and 47 vE (E/C) results are siter						

R Ripple and Noise are measured at 20MHz bandwidth by using a 0.1µF (M/C) or (C/C) and 47µF (E/C) parallel capacitor.

^⑤Note: from 0% to 10% dimming adjustment signal instability may be present.

Isolation Specifications

Parame	eters	Conditions	Typical	Rated	Units
	I/O	3sec		3750	VAC
Tested voltage	I/FG			2000	VAC
	O/FG			500	VAC
Isolation resistance		500VDC	>1000		MΩ

General Specifications

Parameters	Conditions		Typical	Maximum	Units
Switching frequency				125	KHz
	AMER90-50180CAZ			1.87	
Over current protection	AMER90-36250CAZ			2.57	A
	AMER90-24375CAZ			3.8	
Over current protection			≧105		%
Over voltage protection	Refer	to Constant	Current vs. Constant Voltage Mod	le curve	
Short circuit protection			Continuous		
Short circuit restart			Auto recovery		
Over temperature protection			>105°C		
Operating temperature	(115VAC)		-50 to +85		°C
(See Derating Table)	(230VAC)		-55 to +85		°C
Cold Start-up Time	-55°C			35	Sec
Maximum case temperature				100	°C
Storage temperature			-55 to +95		°C
Temperature coefficient			±0.02		% / °C
Cooling	Free air convection				
Humidity				95	% RH
Case material	Aluminum				
Potting	Epoxy (IP68 rated)				
Wires	UL1015 18AWG Input & 14AWG Output *20CM				
Weight			900		g
Dimensions $(L \times H \times W)$	7.13 x 2.32 x 1.85 inches 181.00 x 59.00 x 47.00 mm				
MTBF	>400,000 hrs (MIL-HDBK-217F at +25°C)				


Safety Specifications

Parameters					
Agency approvals	UL, CE				
	UL8750, UL60950-1, EN55022, class B, EN60529(IP68)				
	Information Technology Equipment	EN55022 Class B			
	Harmonic Current Emissions	IEC/EN 61000-3-2, Class C			
	Voltage fluctuations and flicker	IEC/EN 61000-3-3, (EN60555-3)			
	Electrostatic Discharge Immunity	IEC 61000-4-2 Level 3			
Standards	RF, Electromagnetic Field Immunity	IEC 61000-4-3 Level 2			
	Electrical Fast Transient / Burst Immunity	IEC 61000-4-4 Level 2			
	Surge Immunity	IEC 61000-4-5 Level 3			
	RF, Conducted Disturbance Immunity	IEC 61000-4-6 Level 2			
	Power frequency Magnetic Field Immunity	IEC 61000-4-8 Level 1			
	Voltage dips, Short Interruptions Immunity	IEC 61000-4-11			



up to 3.75A | AC-DC / DC-DC | LED Driver / Converter

Dimensions

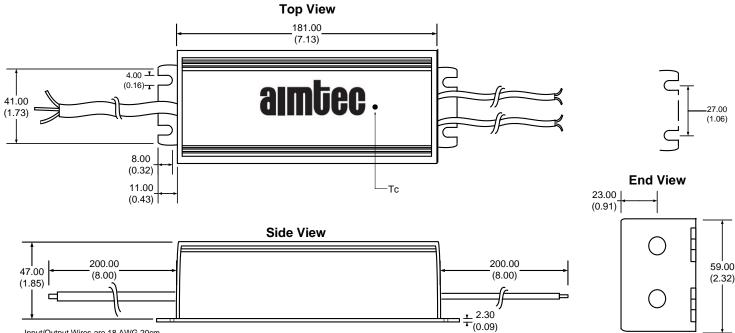


Input/Output Wires are 18 AWG 20cm

Measurements in Millimeters (inch) Case Tolerance: ±0.5 (±0.02)

Wire connection:

Wire	Connection	
Brown	AC L	
Blue	AC N	
Green	Ground	
Red	+V output	
Black	-V Output	
Blue (Dimming)	+ Vs dimming	
White (Dimming)	-Vs dimming	

Analog (resistive) Dimming Application Circuit

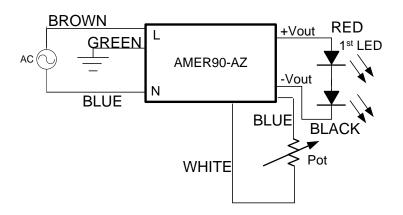


Model Number	Maximum Pot Value (kΩ)
AMER90-50180CAZ	11.70
AMER90-36250CAZ	16.95
AMER90-24375CAZ	28.09




up to 3.75A AC-DC / DC-DC LED Driver / Converter


Analog (0-10V) Dimming Application Circuit

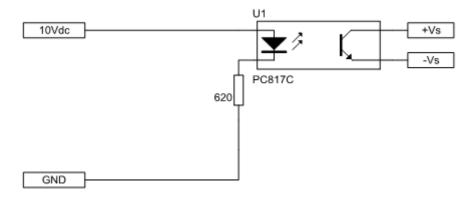

PWM (1KHz) Dimming Application Circuit

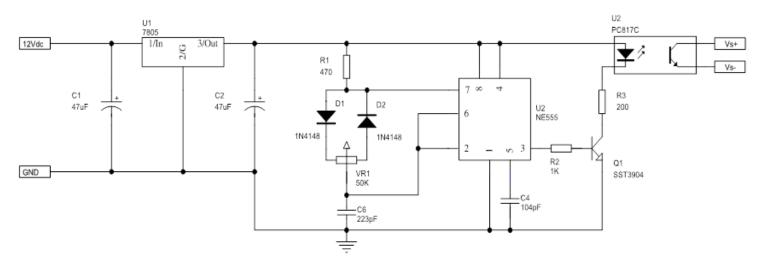

Temperature graph







up to 3.75A AC-DC / DC-DC LED Driver / Converter

Efficiency vs. Input Voltage and Output Current (CC mode)

AMER90-50180CAZ

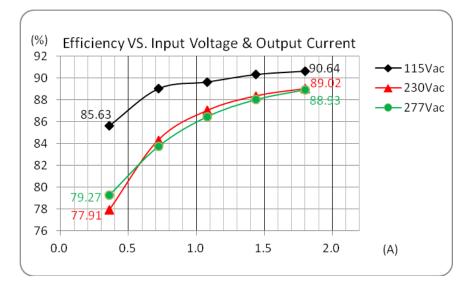

AMER90-36250CAZ

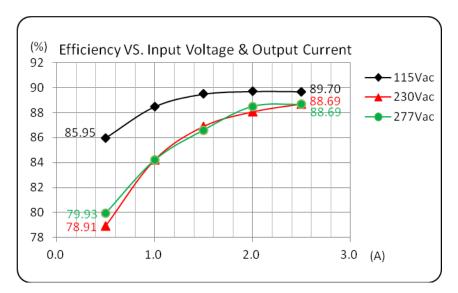




up to 3.75A AC-DC / DC-DC LED Driver / Converter


Efficiency vs. Input Voltage and Output Current (CC mode)

AMER90-24375CAZ

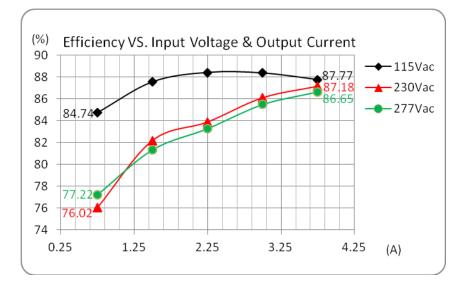

PFC Value vs. Output Load Current (CC mode)

AMEPR90-50180CAZ

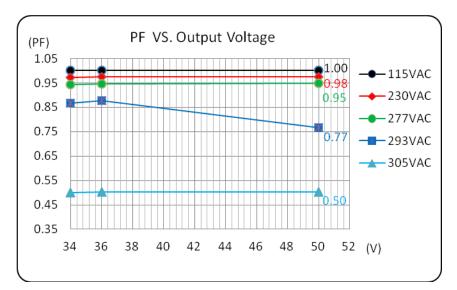





up to 3.75A AC-DC / DC-DC LED Driver / Converter

PFC Value vs. Output Load Current (CC mode)

AMER90-36250CAZ

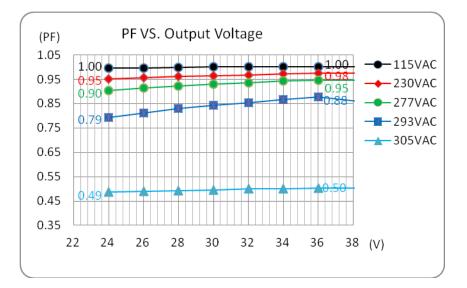

AMER90-24375CAZ

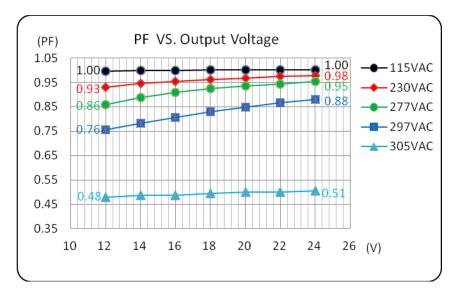





up to 3.75A AC-DC / DC-DC | LED Driver / Converter

Constant Current Mode vs. Constant Voltage Mode

AMER90-50180CAZ

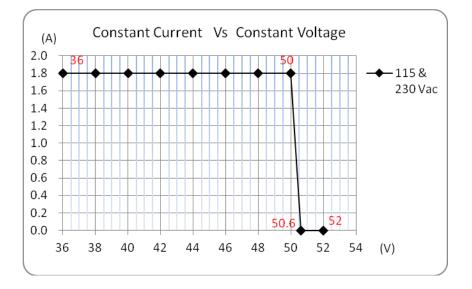

AMER90-36250CAZ

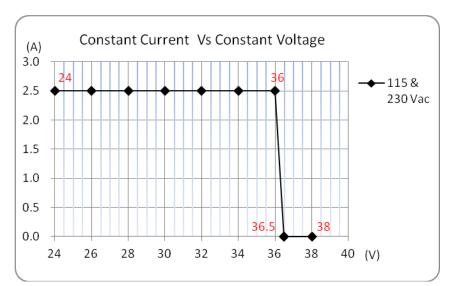




up to 3.75A AC-DC / DC-DC LED Driver / Converter


Constant Current Mode vs. Constant Voltage Mode

AMER90-24375CAZ

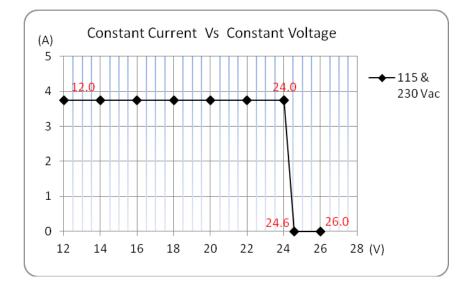

Output Current vs. Radj


AMER90-50180CAZ

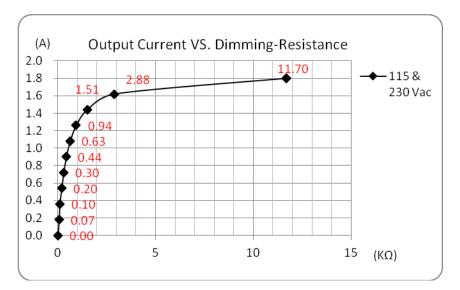




Output Current vs. Radj

AMER90-36250CAZ

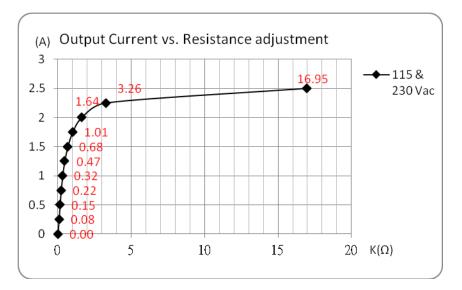

AMER90-24375CAZ

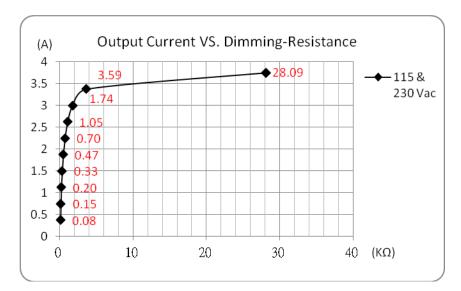

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. **2.** Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. **3.** Mechanical drawings and specifications are for reference only. **4.** All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. **5.** Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. **6.** This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. **7.** Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.